



利华高贸易有限公司

# Aluminum Catalogue 2024

BUILD YOUR DREAMS WITH RELIABLE SOURCING FROM CHINA

 [www.imexao.com](http://www.imexao.com)

for  
19+ YEARS



BST-C01



BST-C02




BST-C03

办公室的私密与公共性的巧妙拿捏，可以造成员工既同在一室又相对隔离的空间效果  
The privacy and publicity of office was handled skillfully, the staff are in the same room but individual correspondingly

### ALM-1 3



使用空间，适用于大楼内分隔墙，办公区域的非承重墙动线走道两侧及部门区域，考虑用于变动性较低，安全及隐蔽性高之场所。  
The use of space, suitable for the separation barrier of building, office within the region of non-load-bearing walls, moving lines on both sides of the aisle and department areas and so are less considered for change, security, and high concealment of the places.

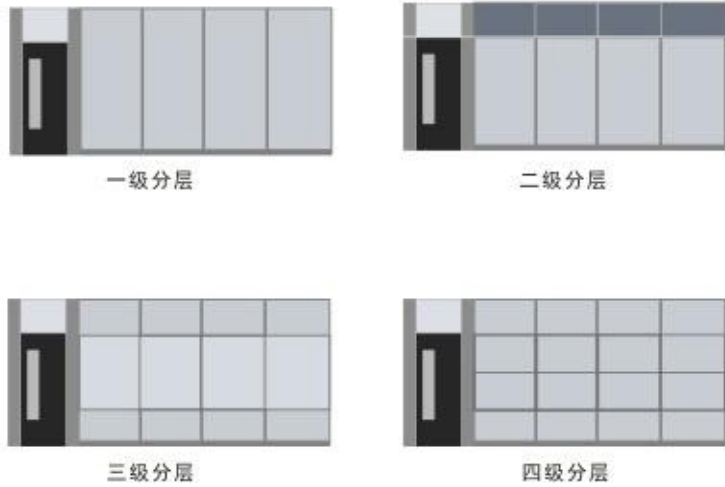


高隔间采用铝合金框架结构钢骨结构耐震性。  
隔间框架以建筑结构力学方式组合，采用一体化的接模式。  
巧妙的价格设计可最大限度吸收天花地面墙柱之间30mm的水平差异调整。  
可适合各种现场状况。多样材质色彩丰富。

High-compartment adopt aluminum frame same structure, steel structure anti-anti-impact, good shock resistance.

Compartment framework combine with construction of structural and mechanics method, using an integrated connect mode.

Clever structural design can maximize absorb the adjustment between the difference level of 30mm of ceiling, floors, wall column.

Can be adapted to a variety of field conditions. Variety of material, rich colors.

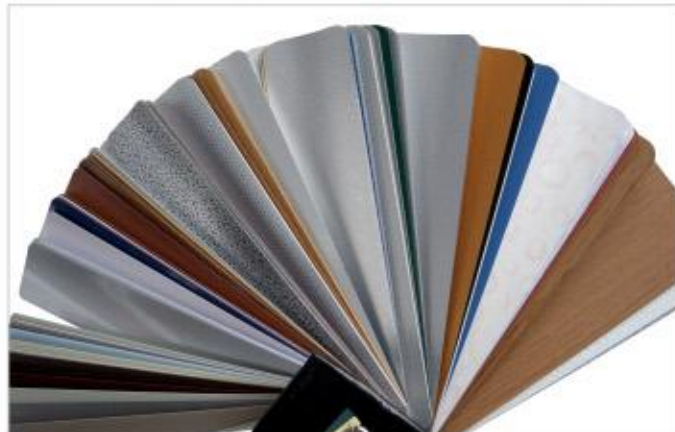

**ALM-1 5**

精确的现场测量，工厂制式生产，现场低噪音无污染快捷组合方式。  
 为您打造高雅 美观 温馨的办公环境。  
 再改变格局或拆迁时重复利用率可达85%以上，可大幅度降低重置成本。  
 Accurate site survey, factory standard production, on-site low-noise non-pollution shortcut combination.  
 For you to create elegant and beautiful and warm office environment.  
 To change the pattern or demolition reuse up to 85% can significantly reduce the Replacement cost.



BST-C15



BST-C16

BST-C17



BST-C18

改变传统的钢筋混凝土的空间区隔方式，让空间的规划不再是固定的屏蔽。  
 当搬迁或房间布局调整，高隔系统可以依新的设计方案，自由地对既定空间做重新区隔。

Change the traditional reinforced concrete space segment, so that space planning is longer a fixed screen wall.  
 When relocation or layout of the room to adjust the high-separated system can be in accordance with the new design, free to established space re-segmentation.



BST-C19



BST-C20



BST-C22

办公室的私密以公共性的巧妙拿捏，可以造成员工既同在一室又相对隔离的空间效果  
The illicit close to public office of clever take hold, can cause both employees together one room and relative isolation space effect



BST-C23



BST-C21

流畅的外观设计，配以银色的轮廓线条，更为办公空间添加活力和朝气。  
Smooth design, coupled with black contours, more office space to add vigor vitality



BST-C24



BST-C25

丰富的选材选择 灵活多变的区间和功能组合给设计师带来更多的设计灵感。  
为企业和个人打造和谐的办公空间，从而实现办公环境整体价值最大化。

Rich is the surface material flexibe rang and combination of features to give designers more design inspiration.  
Office space for businesses and individuals to creaye harmony and humanity,in order to achieve the overall office environment to maximize the value.



BST-C27



BST-C28



BST-C26




BST-C29

IMEXAO  
IMPORTERS EXPORTERS  
+(86) 186-8880-7020



改变传统的钢筋混凝土的空间分隔方式，让空间的规格不再是固定的屏障。当搬迁或房间布局调整，高隔系统可以依新的设计方案，自由地对既定空间做重新区隔。

Change the traditional reinforced concrete space segment, so that the space planning is no longer a fixed screen wall. When relocation or layout of the room to adjust the high-separated system can be in accordance with the new design, free to the established space re-segmentation.

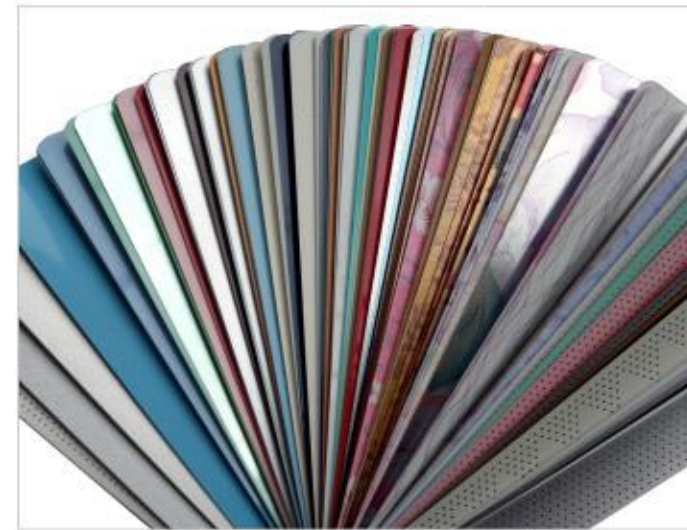

整体美观大气，既能实现超高空间完美组装，同时也完善现代隔细节与间牢固性。

The overall aesthetic atmosphere, can achieve high space perfect assembly, but also improve the modern septum details and fastness.






整体美观大气，既能实现超高空间完美组装，同时也完善现代隔细节与间牢固性。  
The overall aesthetic atmosphere, can achieve high space perfect assembly, but also improve the modern septum details and fastness.



**ALM-1 10**

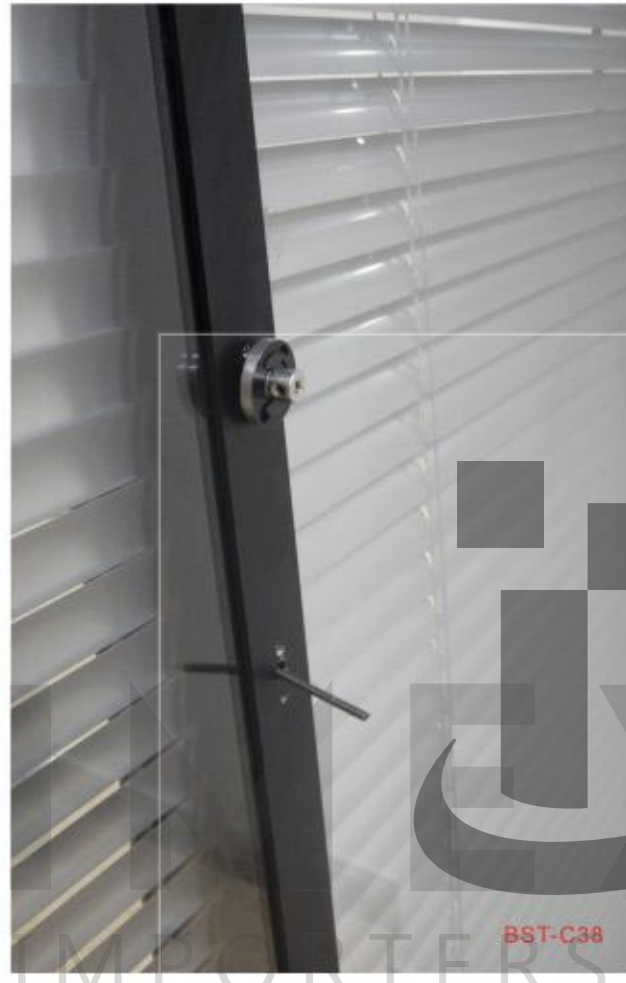

适当采用玻璃面板，营造隐约通透的视觉延伸效果。  
Propoly use glass as a wall to create subtle and transparent vision effect.



+ (86) 186-8880-7020



直线造型时尚简约方正稳固，彰显人文关怀和科技创新。  
Awangte steel and wood combination straighe line model, fashion and brief, Upright and firm, Highlight humastic care and technogical innovation



BST-C45



## ALM-1 12

适当采用玻璃面板，营造隐约通透的视觉延伸效果。  
Profolly use glass as a wall to create subtle and transparent vision effect.




BST-C46


截面图 -80款

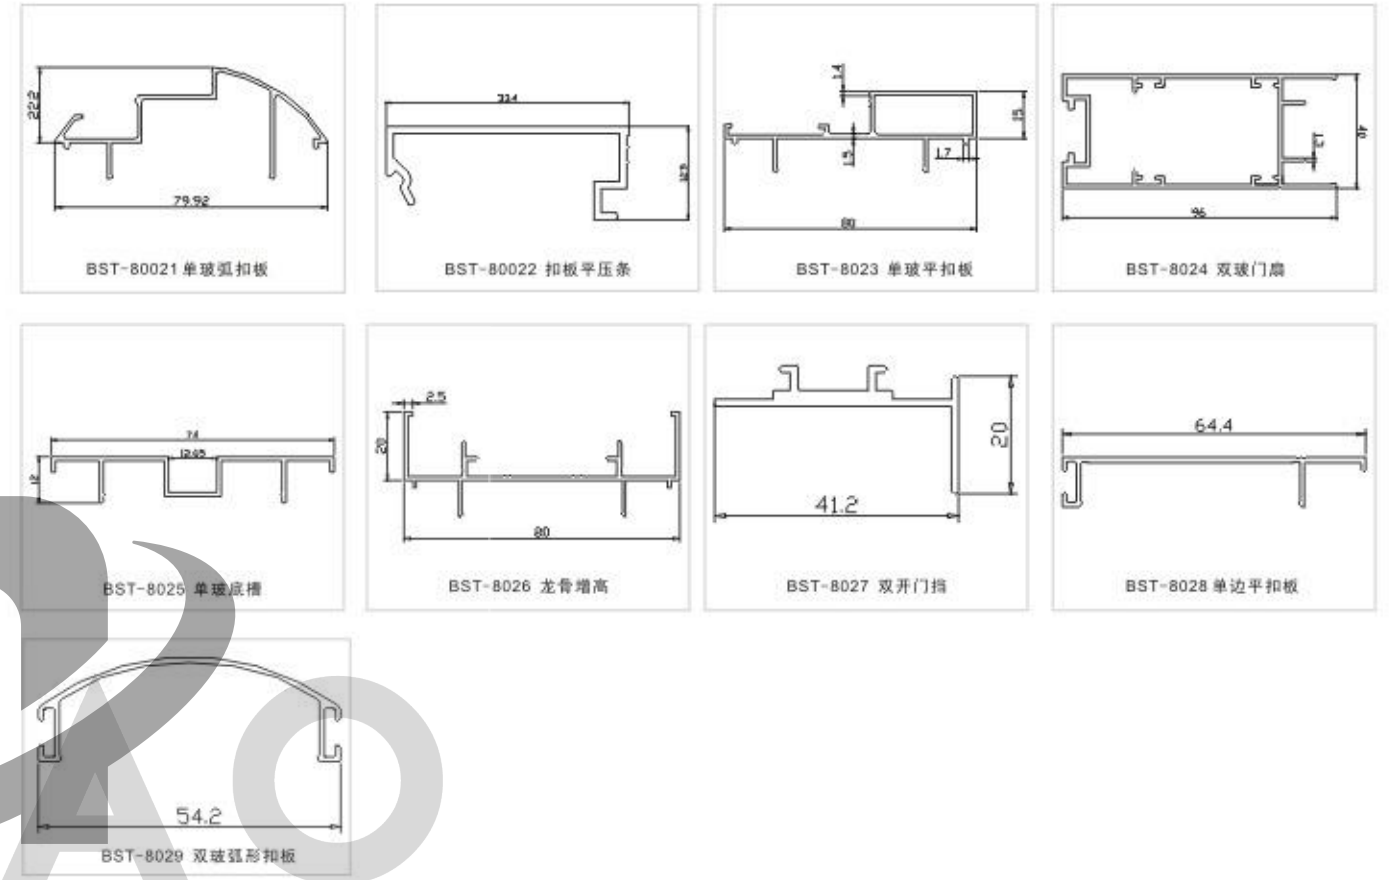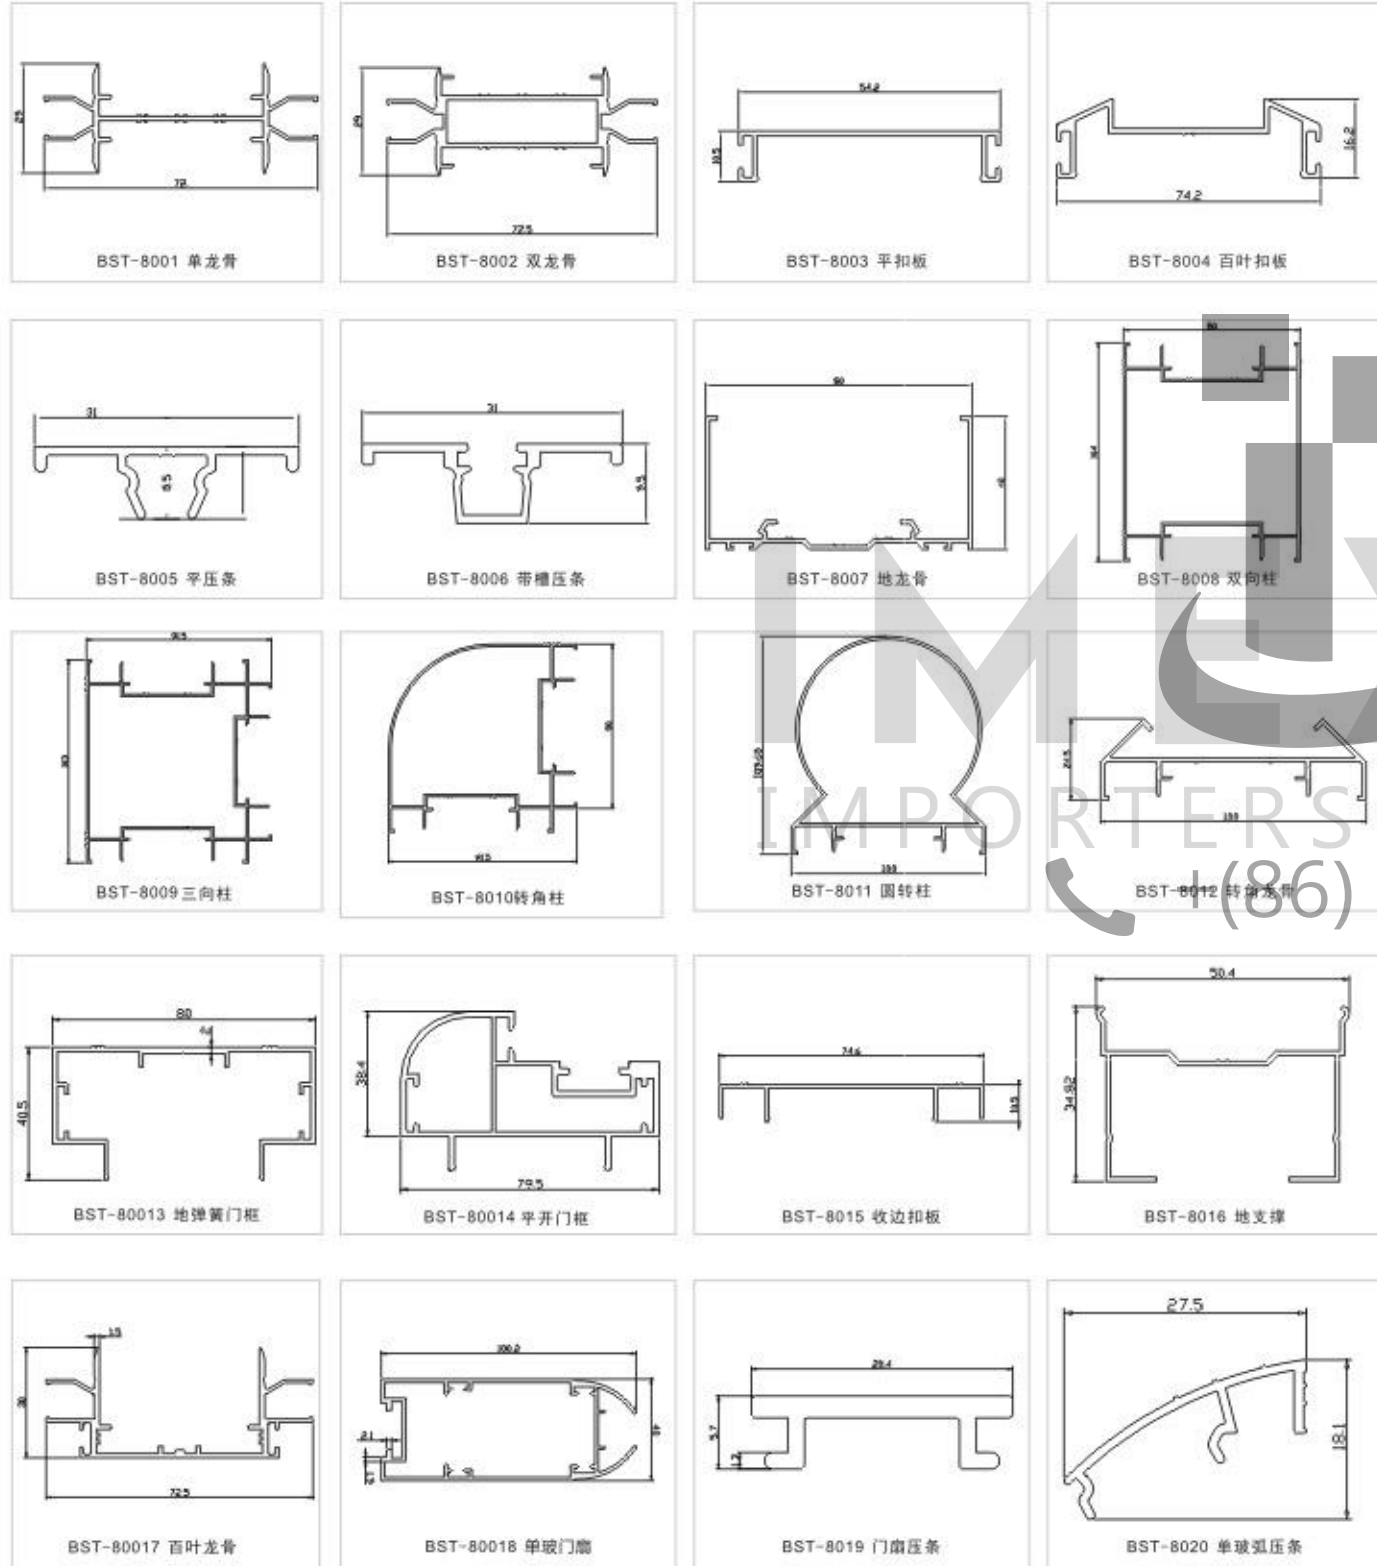

安装示意图 -80款

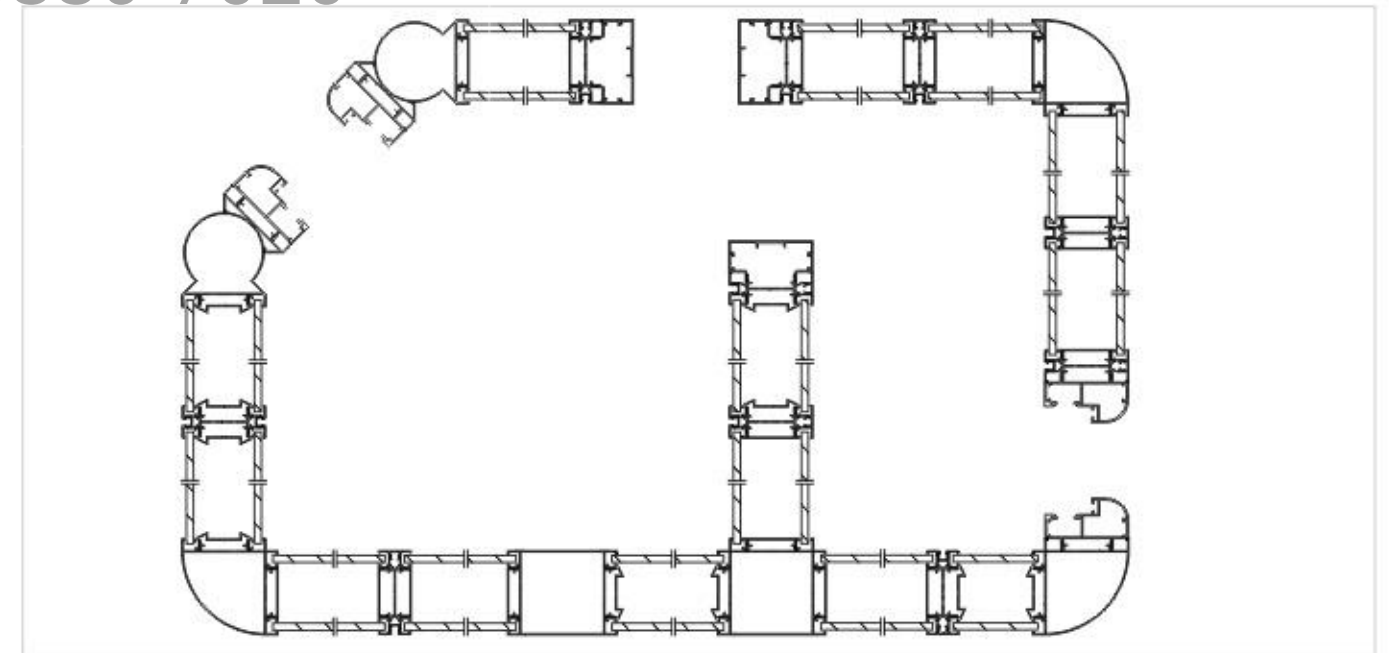


### 80系列单玻示意图

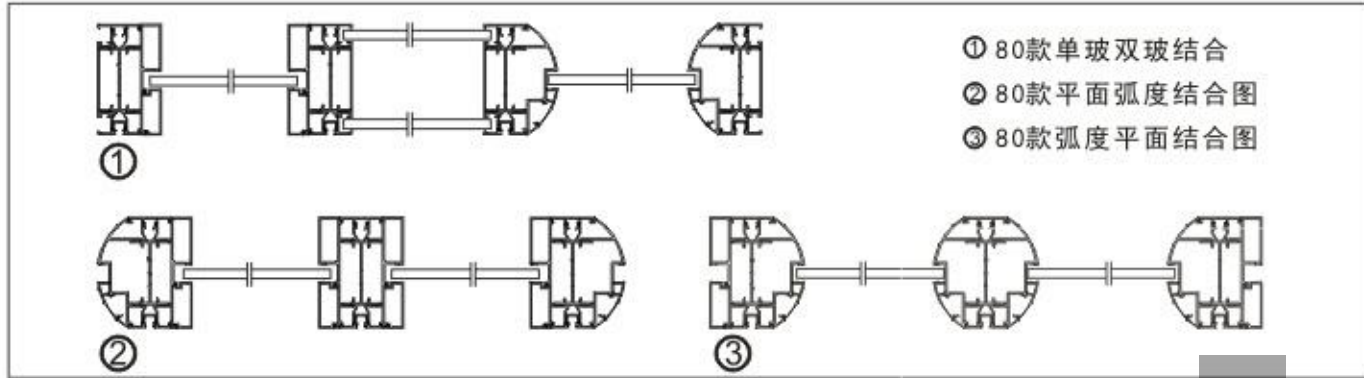


### 铝型材-80款




### 100系列整体装配图

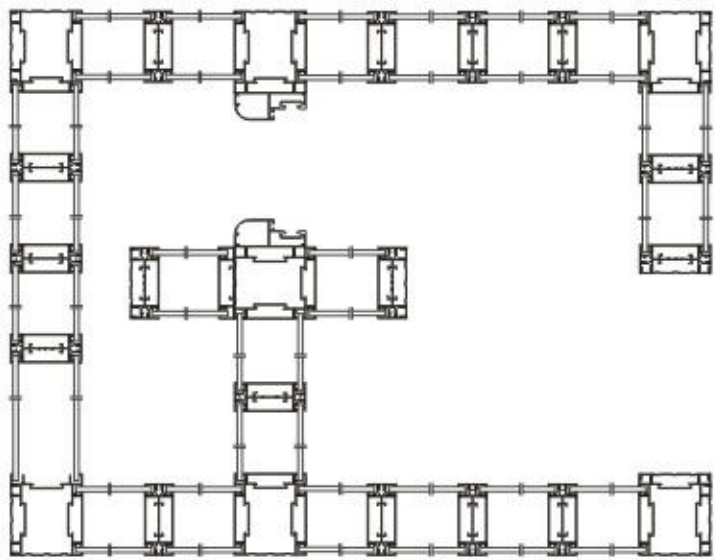


100系列天地轨示意图



100系列三向示意图

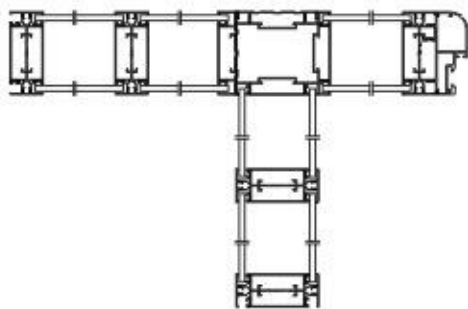


100系列转角示意图




IMEXAO  
IMPORTERS EXPORTERS  
+ (86) 186-8880-7020

截面图-100款

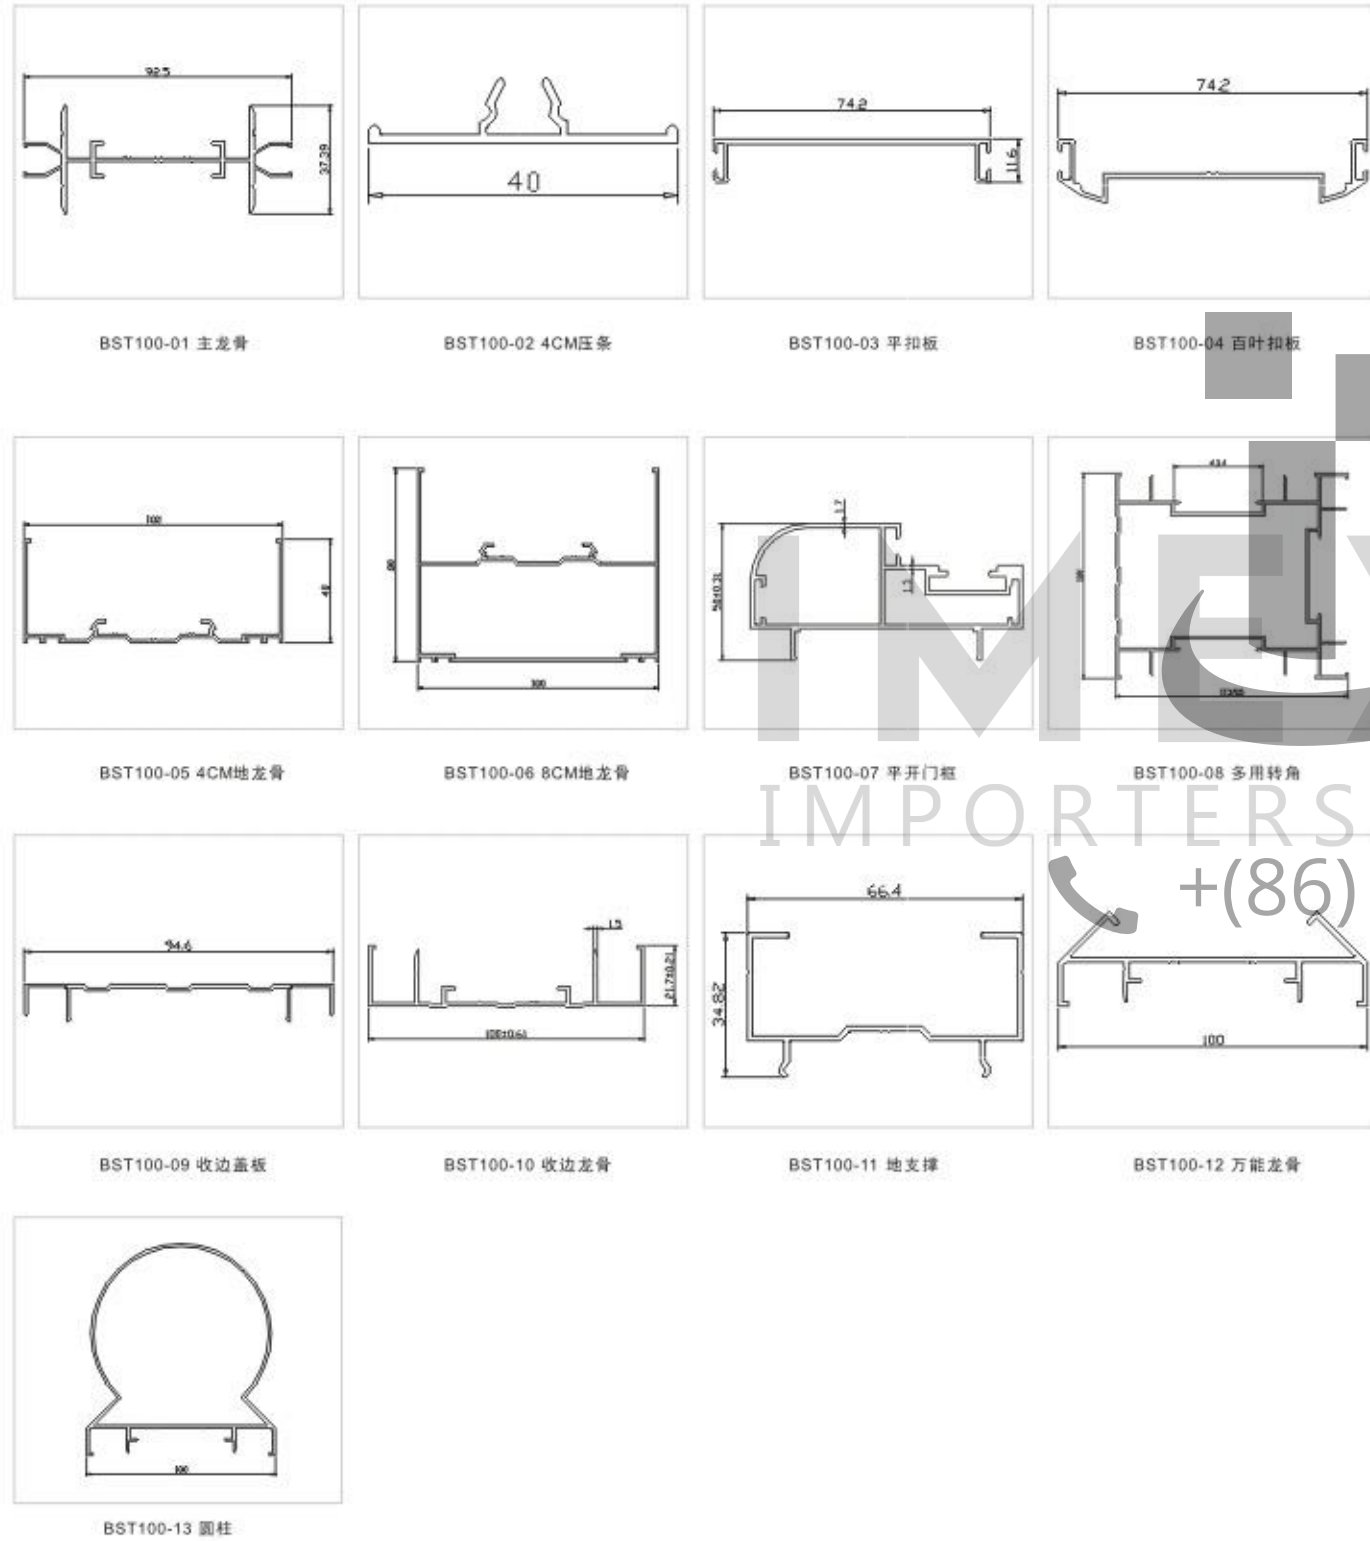


隔墙技术参数

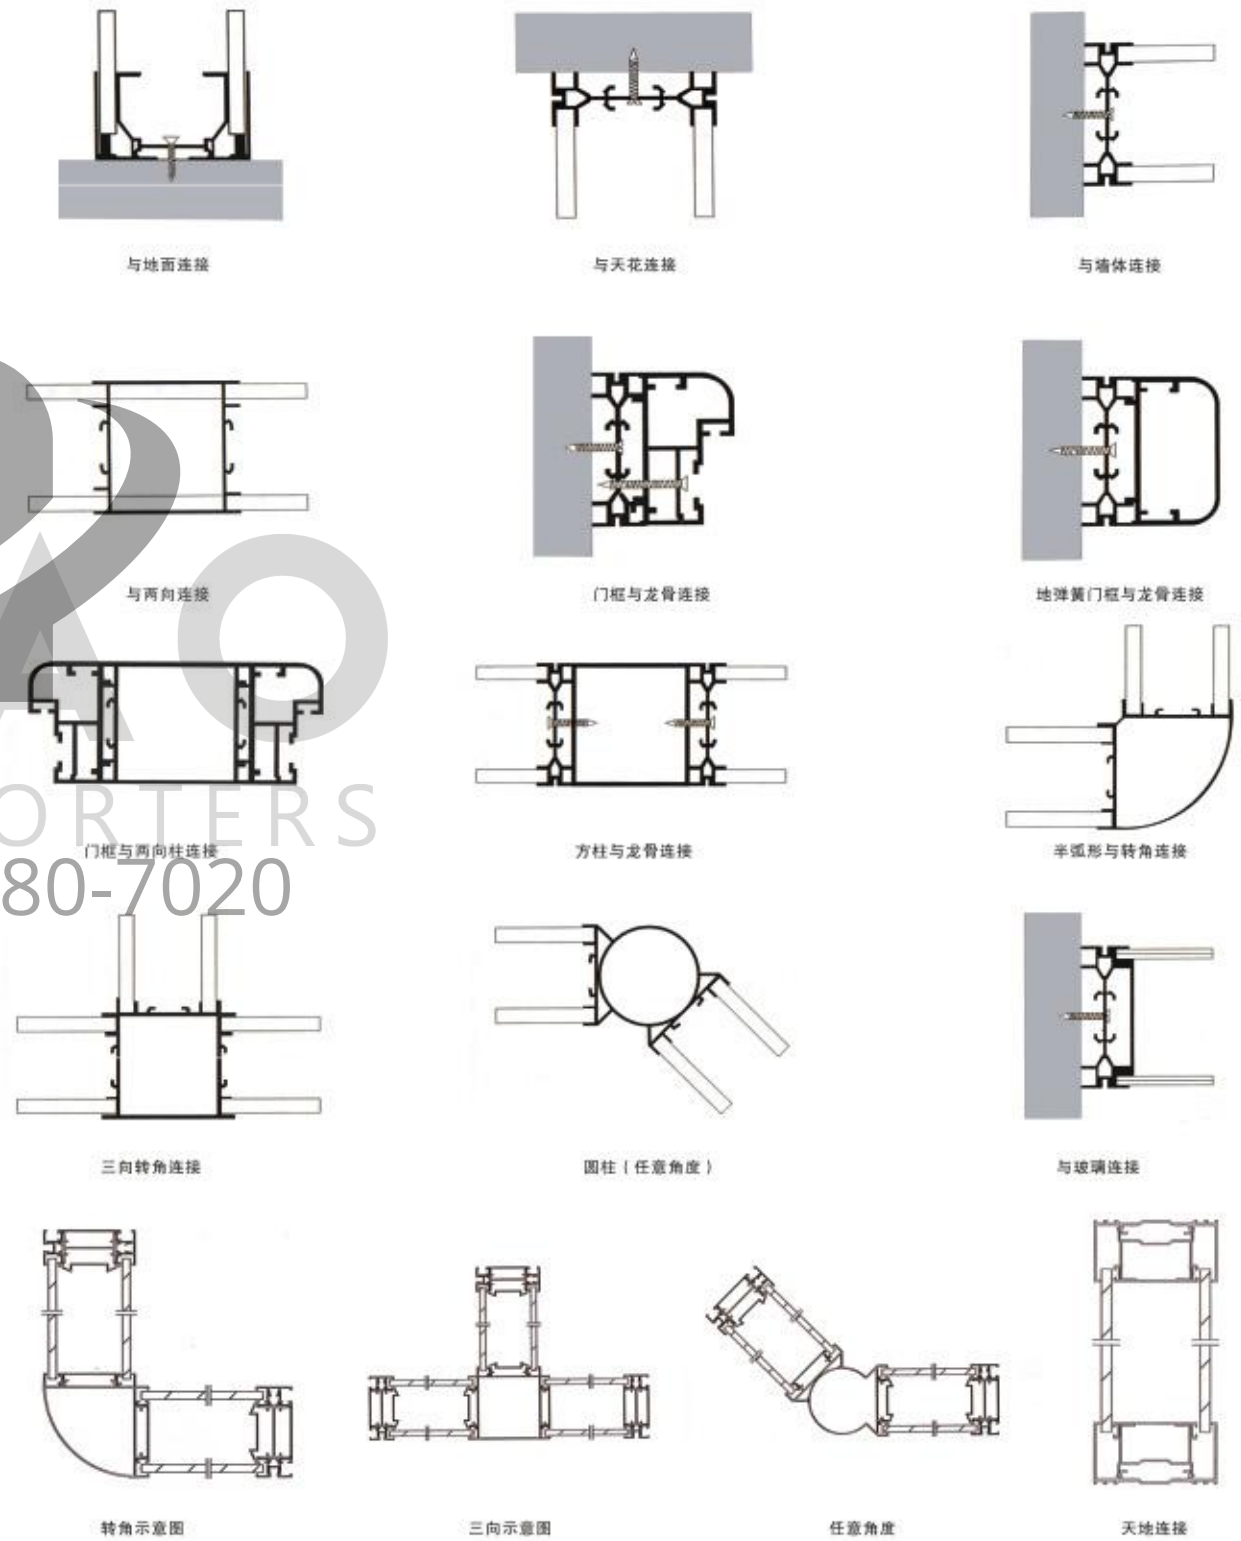


IMPORTERS EXPORTERS  
+ (86) 186-8880-7020

五金配件

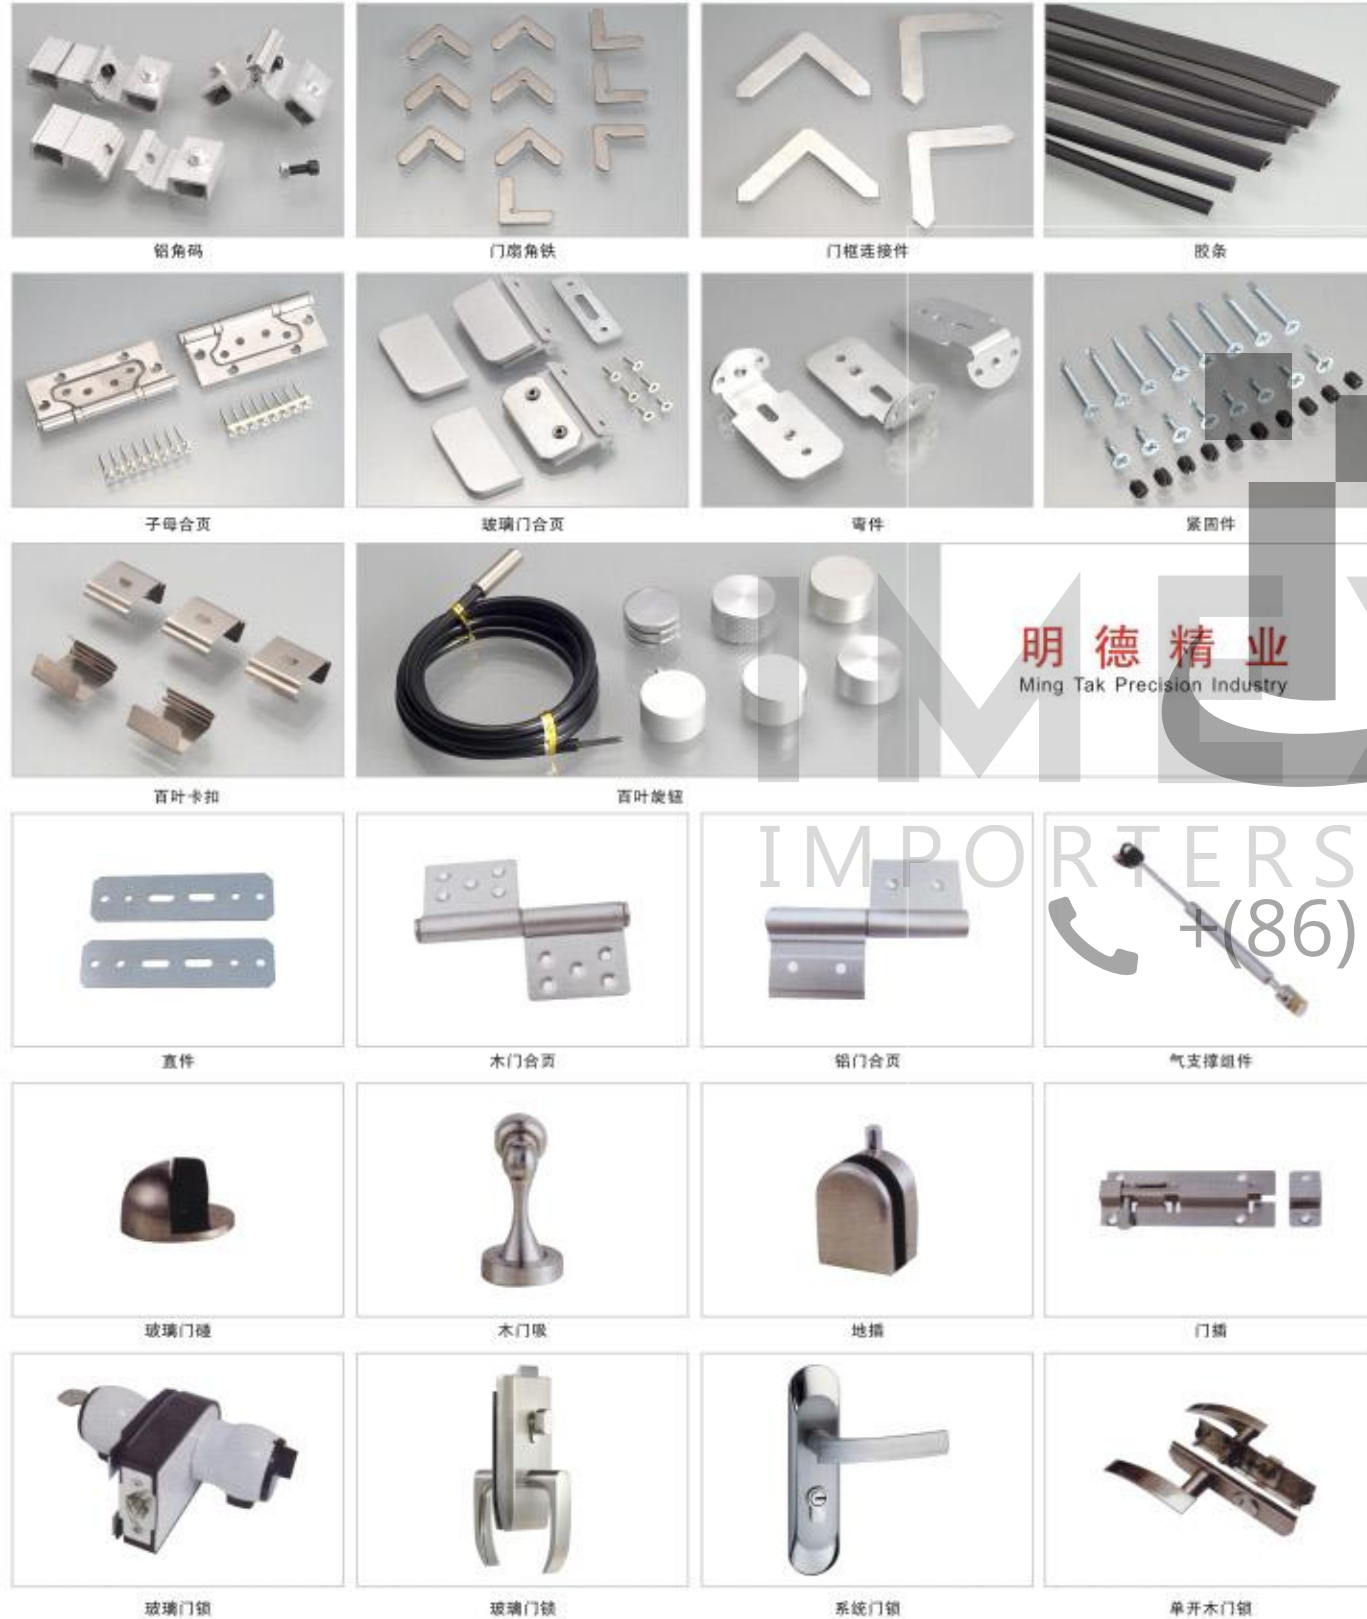


生态门系列

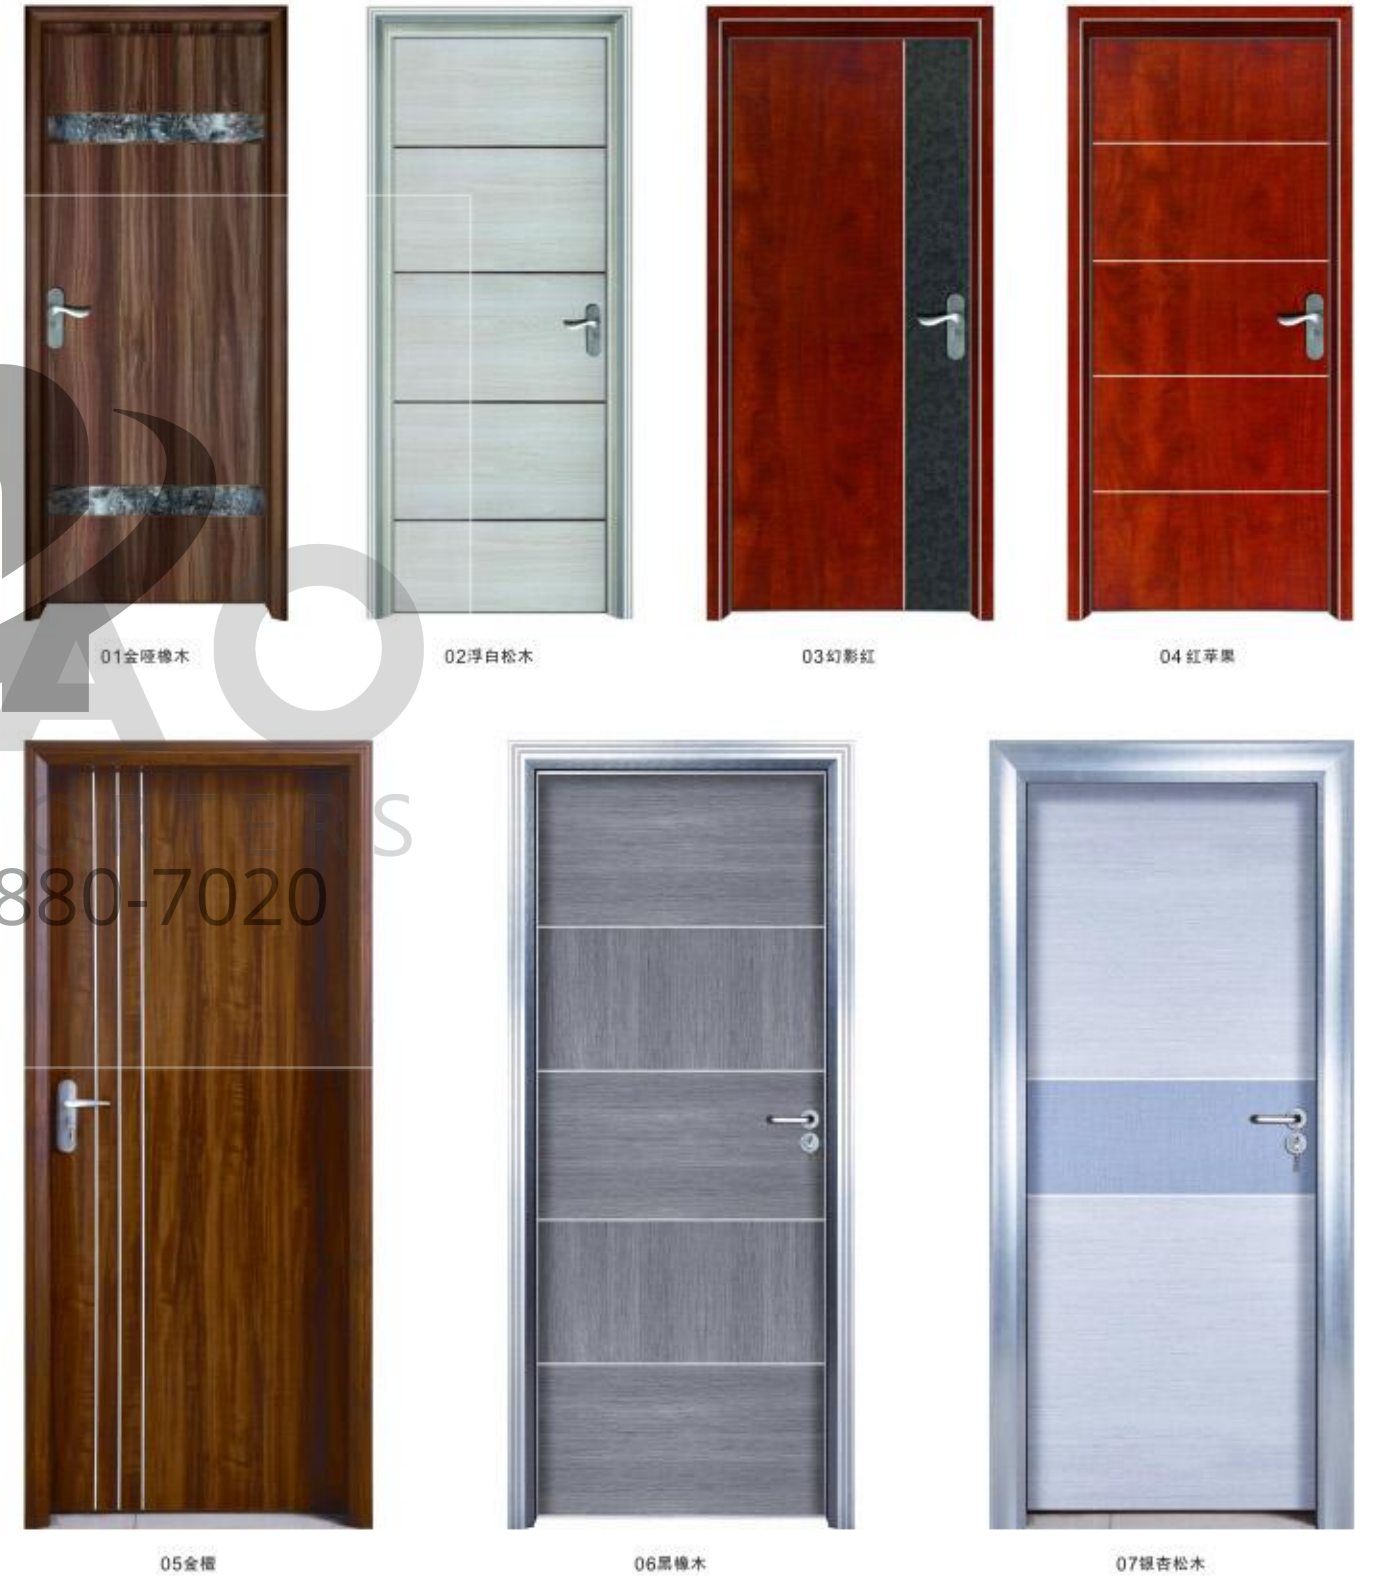

IMPORTERS EXPORTERS  
+ (86) 186-8880-7020

序号 Item No. Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item No. 壁厚 (mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item No. 壁厚 (mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings
1 JN-79801 管上滑 t=1.0 0.81kg/m		JN-79805A 大下方 t=1.0 0.44kg/m		JN-79810A 反插板 t=0.85 0.2kg/m	
2 JN-79801A 上滑 t=1.0 0.6kg/m		JN-79806 光企 t=1.0 0.378kg/m		JN-79811A 转角 t=1.0 0.87kg/m	
3 JN-79802 管下滑 t=1.0 0.68kg/m		JN-79806A 收口光企 t=1.0 0.4kg/m		JN-79813 横纱 t=0.8 0.27kg/m	
4 JN-79803 边封 t=1.0 0.39kg/m		JN-79807 勾企 t=1.0 0.44kg/m		JN-A7512 竖纱 t=0.8 0.25kg/m	
5 JN-79803A 双边封 t=1.0 0.64kg/m		JN-79808 上同 t=1.0 0.43kg/m			
6 JN-79804 上方 t=1.0 0.32kg/m		JN-79809 中柱 t=0.9 0.51kg/m			
7 JN-79805 下方 t=1.0 0.35kg/m		JN-79810 插板 t=0.85 0.18kg/m			

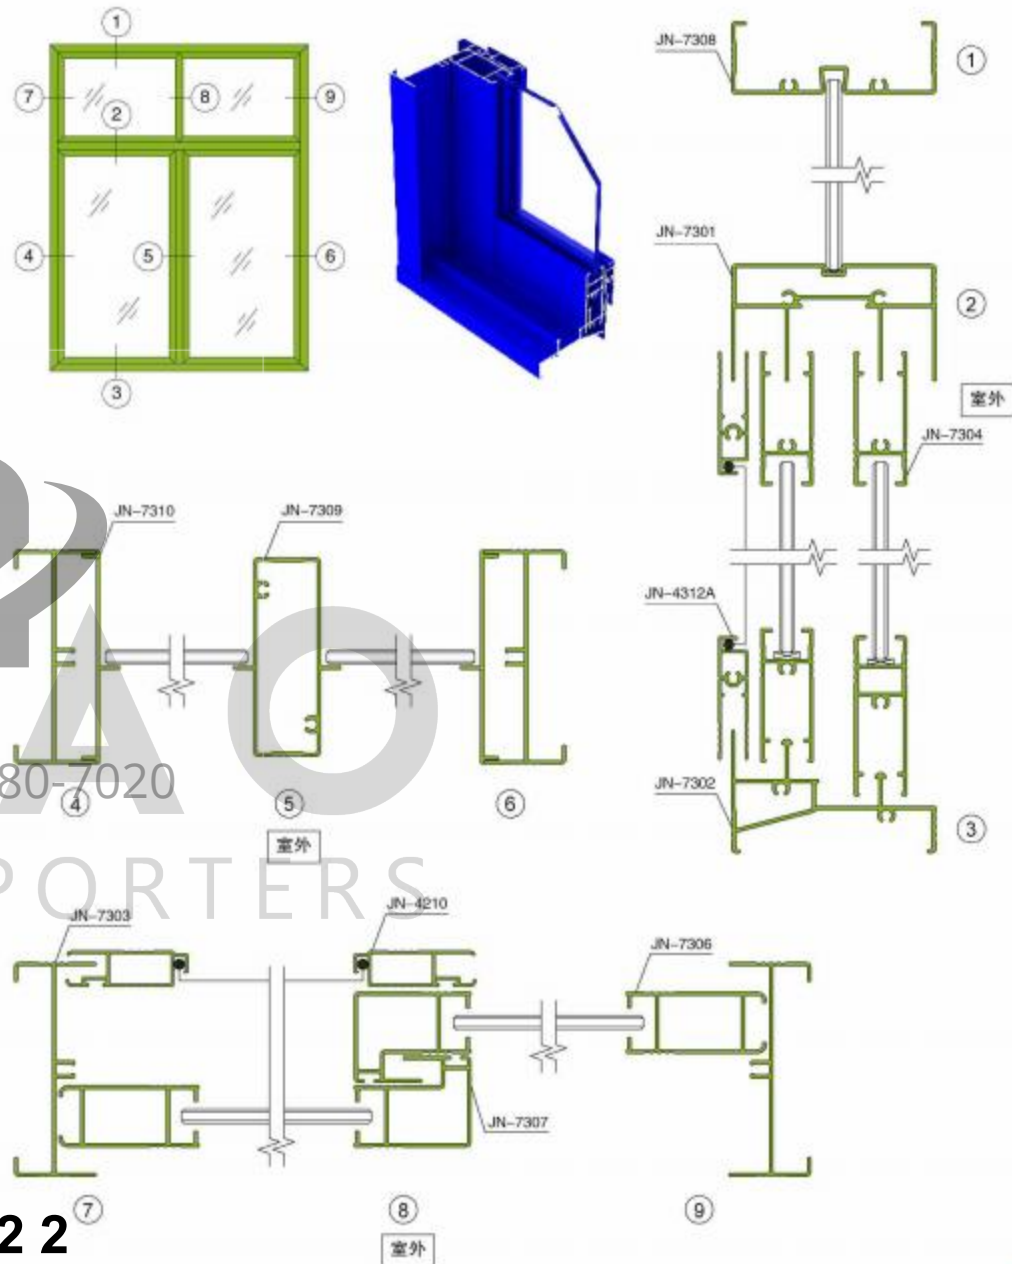

+ (86) 186-8880-7020


**IMEXAO**  
IMPORTERS EXPORTERS

"Let us help to build your dreams"

**ALM-2 2**



序号	型材代号 Item no. 壁厚 (t=mm) 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 壁厚 (t=mm) 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 壁厚 (t=mm) 理论重量 (kg/m) Weight	图示 Drawings
1	JN-7301 上滑 t=1.0 0.796kg/m		JN-7307 勾企 t=0.9 0.393kg/m		JN-4312A 横纱 t=0.7 0.225kg/m	
2	JN-7302 下滑 t=1.0 0.582kg/m		JN-7308 上固定 t=1.0 0.442kg/m			
3	JN-7302A 下滑 t=1.0 0.655kg/m		JN-7309 中柱 t=1.0 0.571kg/m			
4	JN-7303 边封 t=1.0 0.399kg/m		JN-7310 插板 t=0.7 0.175kg/m			
5	JN-7303A 双边封 t=1.0 0.67kg/m		JN-7310A 反插板 t=0.7 0.163kg/m			
6	JN-7304 上下方 t=0.9 0.313kg/m		JN-7311A 转角 t=1.0 0.926kg/m			
7	JN-7306 光企 t=0.9 0.354kg/m		JN-4210 竖纱 t=0.7 0.218kg/m			

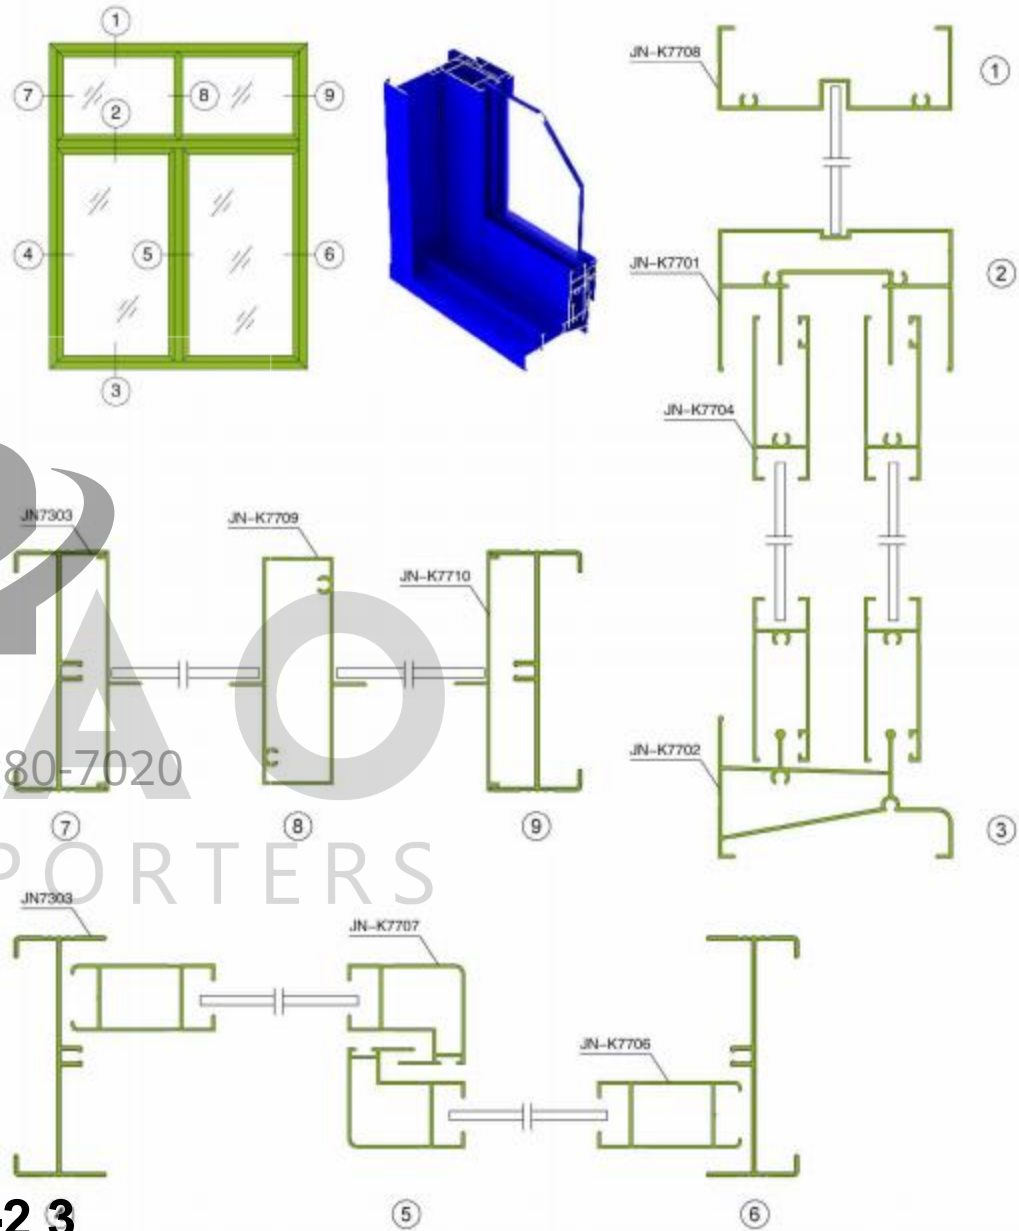

+ (86) 186-8880-7020



"Let us help to build your dreams"


**ALM-2 3**

序号 Item no. Thickness (mm) 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 壁厚 (mm) 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 壁厚 (mm) 理论重量 (kg/m) Weight	图示 Drawings
1 JN-K7701 管上滑 t=1.0 0.806kg/m		JN-K7707B 大光企 t=0.9 0.404kg/m			
2 JN-K7702 下滑 t=1.0 0.648kg/m		JN-K7708 上扇 t=1.0 0.433kg/m			
3 JN-K7704 上下方 t=0.9 0.331kg/m		JN-K7709 中柱 t=0.9 0.518kg/m			
4 JN-K7706 小光企 t=0.9 0.326kg/m		JN-K7710 隔板 t=0.8 0.197kg/m			
5 JN-K7706A 收口光企 t=0.9 0.339kg/m		JN-7303 边封 t=1.0 0.399kg/m			
6 JN-K7706B 大光企 t=0.9 0.364kg/m					
7 JN-K7707 小光企 t=0.9 0.36kg/m					




**IMEXAO**  
IMPORTERS EXPORTERS

"Let us help to build your dreams"

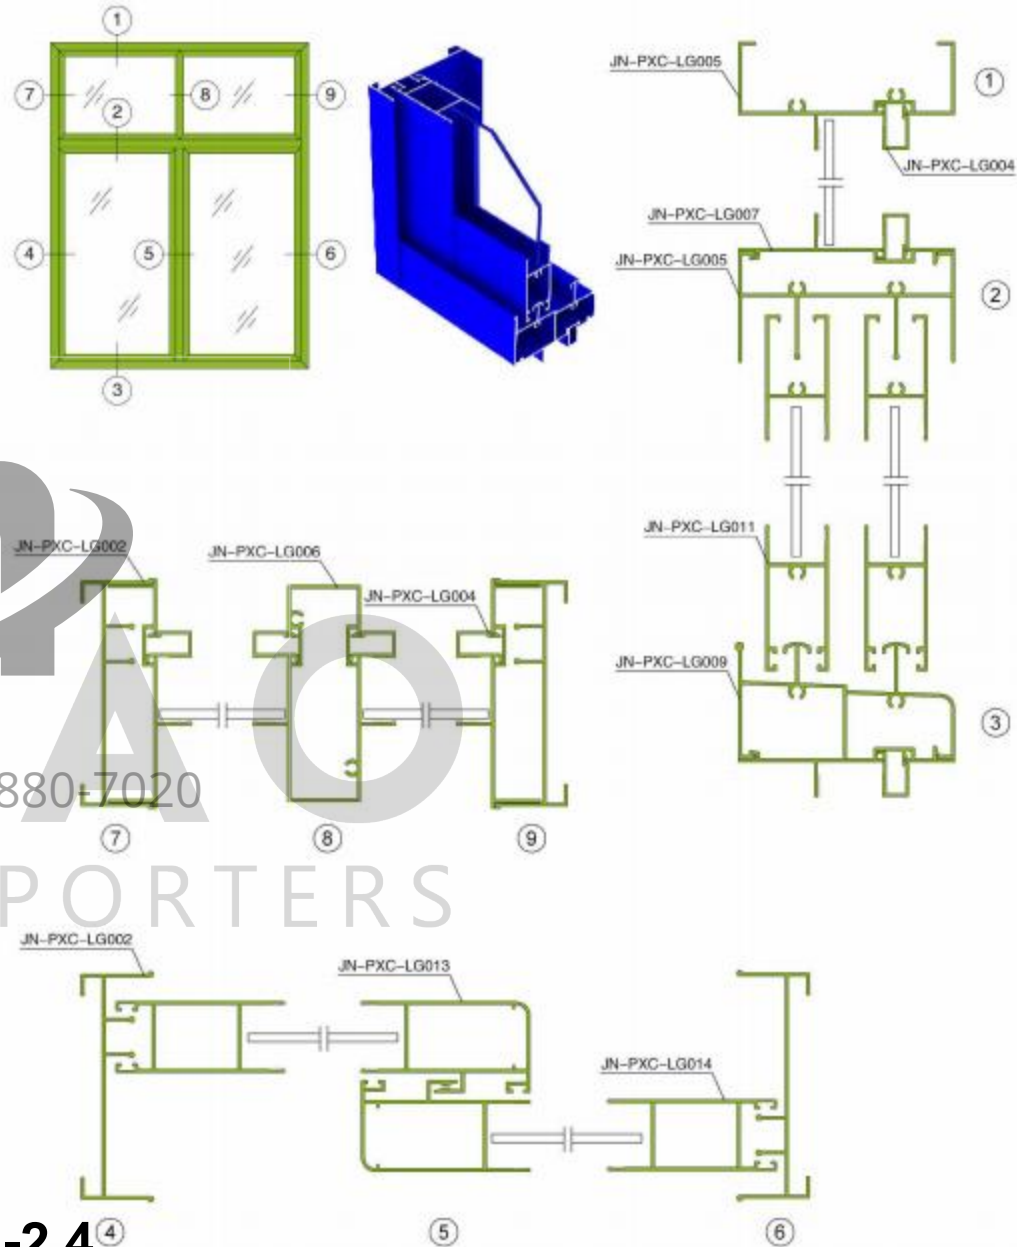

**ALM-2 4**

序号 Item no. 厚度 (t=mm) Thickness 单位重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 壁厚 (t=mm) Thickness 单位重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 壁厚 (t=mm) Thickness 单位重量 (kg/m) Weight	图示 Drawings
1 JN-PXC-LG001 转角 t=1.2 1.227kg/m		JN-PXC-LG008 插板 t=1.1 0.402kg/m		JN-PXC-LG015 纱料 t=1.2 0.655kg/m	
2 JN-PXC-LG002 边封 t=1.1 0.482kg/m		JN-PXC-LG009 下滑 t=1.1 0.73kg/m			
3 JN-PXC-LG003 双边封 t=1.1 0.878kg/m		JN-PXC-LG010 上滑 t=1.1 0.662kg/m			
4 JN-PXC-LG004 压线 t=1.0 0.115kg/m		JN-PXC-LG011 上方 t=1.1 0.369kg/m			
5 JN-PXC-LG005 上滑 t=1.1 0.521kg/m		JN-PXC-LG012 下方 t=1.1 0.429kg/m			
6 JN-PXC-LG006 中柱 t=1.1 0.779kg/m		JN-PXC-LG013 勾企 t=1.1 0.589kg/m			
7 JN-PXC-LG007 反滑槽 t=1.1 0.323kg/m		JN-PXC-LG014 光企 t=1.1 0.496kg/m			

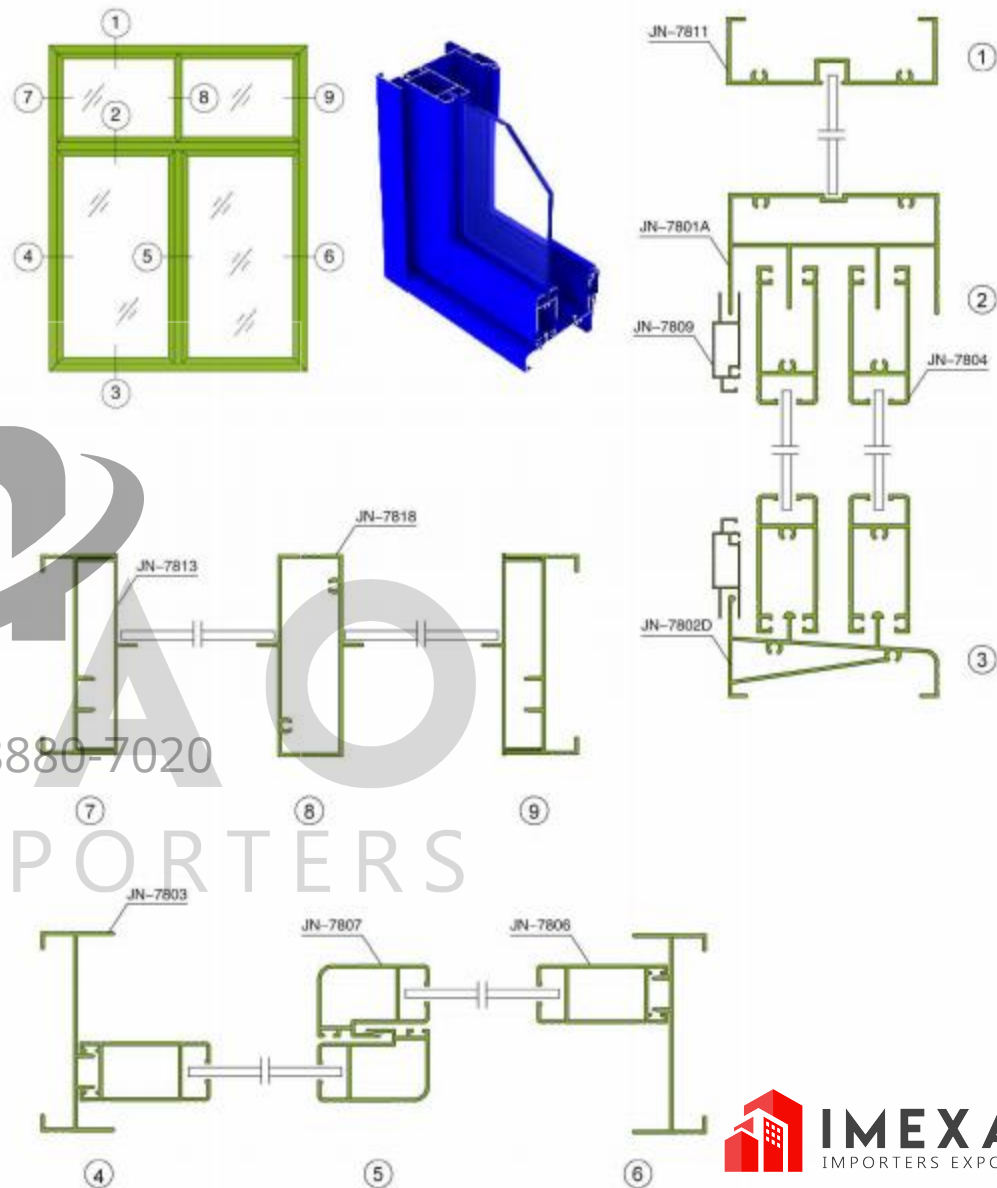

+ (86) 186-8880-7020

IMEXAO IMPORTERS EXPORTERS

ALM-2 5

**IMEXAO**  
IMPORTERS EXPORTERS

"Let us help to build your dreams"





序号 Item no.	图示 Drawings	材料代号 Item no. 壁厚 (t:mm) Thickness 单位重量 (kg/m) Weight	图示 Drawings	材料代号 Item no. 壁厚 (t:mm) Thickness 单位重量 (kg/m) Weight	图示 Drawings
1	JN-7801 上滑 t=0.9 0.573kg/m 	JN-7803A 双边封 t=1.0 0.779kg/m		JN-7806DF 收口光企 t=0.9 0.45kg/m 	
2	JN-7801A 上滑 t=0.9 0.76kg/m 	JN-7803B 管边封 t=0.9 0.554kg/m 	JN-7807 勾企 t=0.85 0.42kg/m 		
3	JN-7802 下滑 t=0.9 0.477kg/m 	JN-7803D 边封 t=1.2 0.523kg/m 	JN-7807D 勾企 t=0.9 0.435kg/m 		
4	JN-7802A 下滑 t=1.0 0.664kg/m 	JN-7804 上下方 t=0.85 0.372kg/m 	JN-7808 收口 t=0.85 0.22kg/m 		
5	JN-7802D 下滑 t=1.2 0.6kg/m 	JN-7804D 上下方 t=0.9 0.38kg/m 	JN-7809 纱窗料 t=0.7 0.207kg/m 		
6	JN-7802E 下滑 t=1.0 0.897kg/m 	JN-7806 光企 t=0.85 0.412kg/m 	JN-7809A 纱窗料 t=0.8 0.247kg/m 		
7	JN-7803 边封 t=0.9 0.391kg/m 	JN-7806D 光企 t=0.9 0.429kg/m 	JN-7809B 纱窗料 t=0.8 0.257kg/m 		

序号 Item no.	图示 Drawings	材料代号 Item no. 壁厚 (t:mm) Thickness 单位重量 (kg/m) Weight	图示 Drawings	材料代号 Item no. 壁厚 (t:mm) Thickness 单位重量 (kg/m) Weight	图示 Drawings
1	JN-7810 转角 t=1.0 1.02kg/m 	JN-A7802 下滑 t=1.35 0.65kg/m 	JN-A7810A 右转角 t=1.35 1.21kg/m 		
2	JN-7811 上滑 t=0.9 0.445kg/m 	JN-A7803 边封 t=1.35 0.59kg/m 	JN-A7810B 左转角 t=1.35 1.21kg/m 		
3	JN-7813 插板 t=0.8 0.296kg/m 	JN-A7803A 双边封 t=1.35 1.05kg/m 	JN-A7811 上滑 t=1.35 0.63kg/m 		
4	JN-7813A 反插板 t=1.0 0.279kg/m 	JN-A7804 上下方 t=1.35 0.56kg/m 	JN-A7811E 上滑 t=1.0 0.465kg/m 		
5	JN-781B 中柱 t=0.8 0.645kg/m 	JN-A7806 光企 t=1.35 0.862kg/m 	JN-A7813 插板 t=1.0 0.32kg/m 		
6	JN-A7801 上滑 t=1.35 0.83kg/m 	JN-A7807 勾企 t=1.35 0.648kg/m 	JN-A7818 中柱 t=1.35 0.844kg/m 		
7	JN-A7801A 上滑 t=1.35 1.1kg/m 	JN-A7810 转角 t=1.35 1.39kg/m 			

ALM-26

+ (86) 186-8880-7020

IMPORTERS EXPORTERS

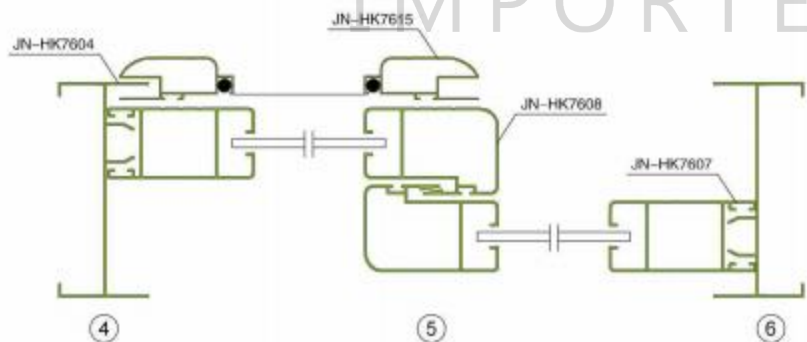
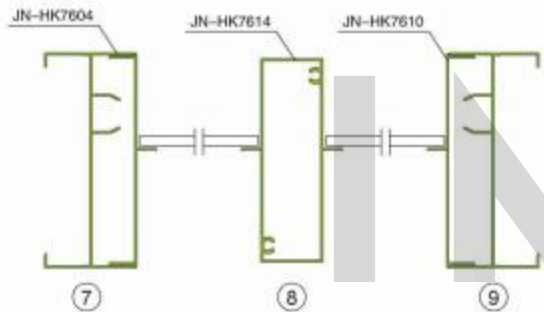
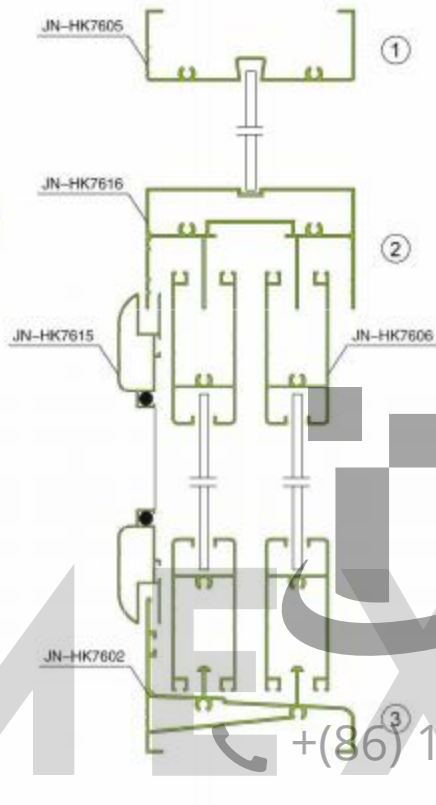
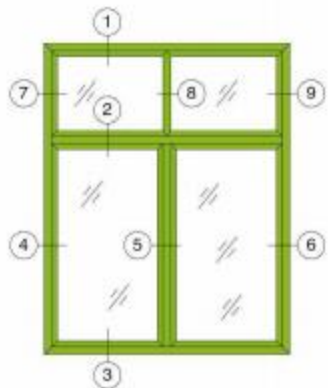


+ (86) 186-8880-7020

IMPORTERS EXPORTERS

ALM-27

序号 Item no. 厚度 (t=mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 厚度 (t=mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 厚度 (t=mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings
1 JN-HK7601 下滑 t=1.1 0.718kg/m		JN-HK7608 勾企 t=0.8 0.415kg/m		JN-HK7614 中柱 t=1.1 0.644kg/m	
2 JN-HK7602 下滑 t=1.1 0.83kg/m		JN-HK7609 工字 t=0.8 0.305kg/m		JN-HK7615 纱窗 t=0.65 0.212kg/m	
3 JN-HK7603 上滑 t=1.0 0.845kg/m		JN-HK7610 落板 t=0.8 0.22kg/m		JN-HK7616 上滑 t=1.0 0.883kg/m	
4 JN-HK7604 边封 t=1.0 0.467kg/m		JN-HK7611 转角 t=1.0 1.01kg/m			
5 JN-HK7605 上固定 t=1.0 0.483kg/m					
6 JN-HK7606 上下方 t=1.0 0.492kg/m		JN-HK7612 收口 t=0.8 0.203kg/m			
7 JN-HK7607 光企 t=0.8 0.407kg/m		JN-HK7613 反插板 t=1.0 0.242kg/m			

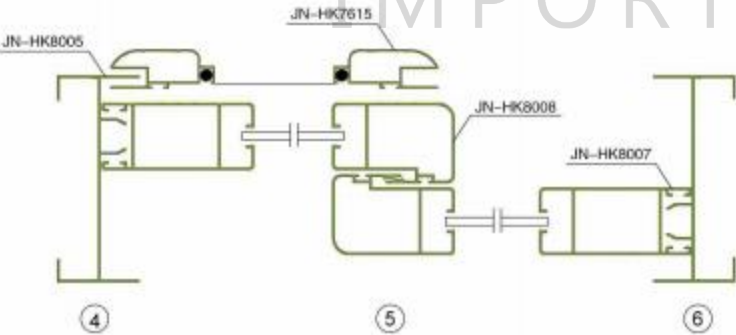
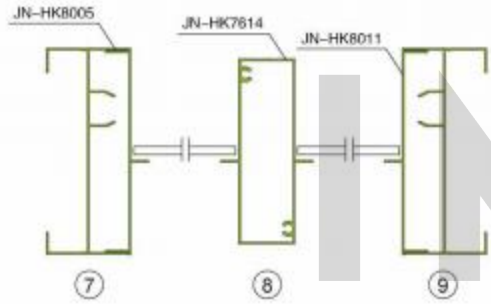
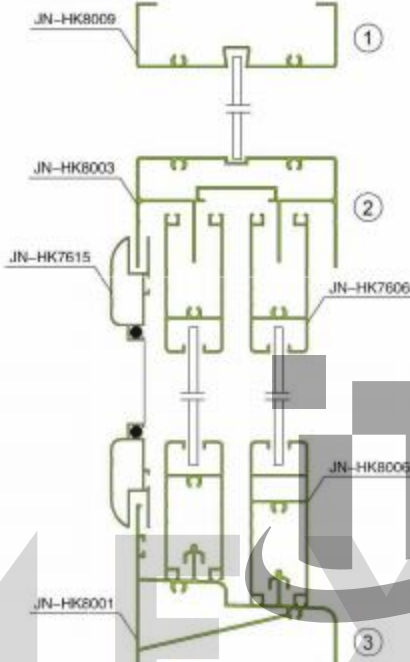
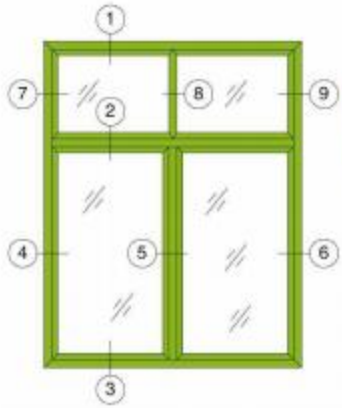


+ (86) 186-8880 7020

IMPORTERS EXPORTERS

ALM-2 8

序号 Item no. Item no. 厚度 (mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. Item no. 壁厚 (mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. Item no. 壁厚 (mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings
1 JN-HK8001 下滑 t=1.1 1.01kg/m		JN-HK8007A 光企 t=1.2 0.667kg/m		JN-HK7606 上下方 t=1.0 0.492kg/m	
2 JN-HK8002 下滑 t=1.2 0.71kg/m		JN-HK8008 勾企 t=1.0 0.546kg/m		JN-HK7606A 上下方 t=1.2 0.59kg/m	
3 JN-HK8003 上滑 t=1.1 0.96kg/m		JN-HK8008A 勾企 t=1.2 0.656kg/m		JN-HK7612 收口 t=0.8 0.203kg/m	
4 JN-HK8004 上滑 t=1.0 0.662kg/m		JN-HK8009 上固定 t=1.1 0.534kg/m		JN-HK7613 反插板 t=1.0 0.242kg/m	
5 JN-HK8005 边封 t=1.1 0.54kg/m		JN-HK8010 工字 t=0.8 0.316kg/m		JN-HK7614 中柱 t=1.1 0.644kg/m	
6 JN-HK8006 大下方 t=1.1 0.671kg/m		JN-HK8011 插板 t=1.1 0.316kg/m		JN-HK7615 纱窗 t=0.65 0.212kg/m	
7 JN-HK8007 光企 t=1.0 0.573kg/m		JN-HK8012 转角 t=1.1 1.174kg/m			

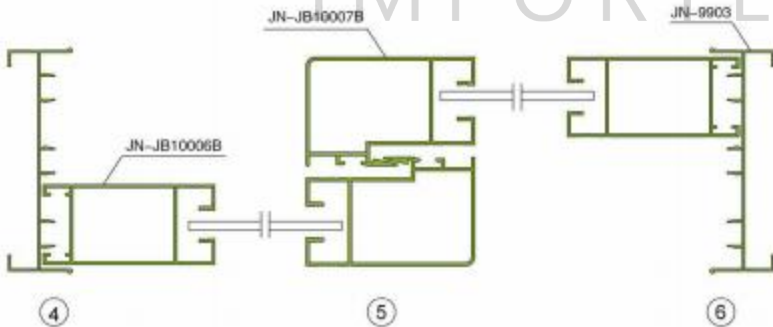
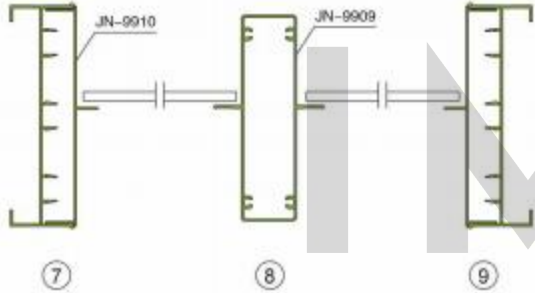

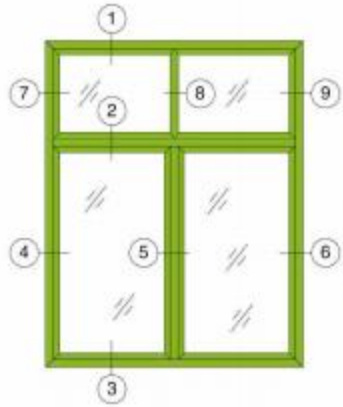


+ (86) 186-8880-7020

IMPORTERS EXPORTERS

ALM-29

序号 Item no. Thickness (kg/m) Weight	图示 Drawings	型材代号 Item no. 厚度 (t=mm) 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 厚度 (t=mm) 理论重量 (kg/m) Weight	图示 Drawings
1	JN-9901 管上滑 t=1.1 1.253kg/m	JN-9905 上方 t=0.9 0.414kg/m	JN-9910 边封插板 t=0.9 0.332kg/m	JN-9911 横纱 t=0.9 0.454kg/m	JN-9912 竖纱 t=0.9 0.452kg/m
2	JN-JB10001 平上滑 t=1.0 0.784kg/m	JN-9905A 大下方 t=0.9 0.521kg/m	JN-9911 横纱 t=0.9 0.454kg/m	JN-9912 竖纱 t=0.9 0.452kg/m	JN-9913 转角 t=1.0 0.983kg/m
3	JN-JB10002 下滑 t=1.0 0.695kg/m	JN-JB10006B 光企 t=0.9 0.48kg/m	JN-9908A 收口 t=0.9 0.205kg/m	JN-JB10007B 勾企 t=0.9 0.473kg/m	JN-9914 工字 t=1.0 0.420kg/m
4	JN-9902 下滑 t=1.1 0.991kg/m	JN-9908A 收口 t=0.9 0.205kg/m	JN-9906 上窗 t=1.1 0.578kg/m	JN-9909 中柱 t=1.0 0.822kg/m	JN-100X25 100X25方管 t=1.0 0.672kg/m
5	JN-9902A 高低下滑 t=1.1 1.226kg/m	JN-9908A 收口 t=0.9 0.205kg/m	JN-9906 上窗 t=1.1 0.578kg/m	JN-9909 中柱 t=1.0 0.822kg/m	JN-100X25 100X25方管 t=1.0 0.672kg/m
6	JN-9903 边封 t=1.1 0.62kg/m	JN-9906 上窗 t=1.1 0.578kg/m	JN-9914 工字 t=1.0 0.420kg/m	JN-9909 中柱 t=1.0 0.822kg/m	JN-100X25 100X25方管 t=1.0 0.672kg/m
7	JN-9904 下方 t=0.9 0.414kg/m	JN-9909 中柱 t=1.0 0.822kg/m	JN-9914 工字 t=1.0 0.420kg/m	JN-9909 中柱 t=1.0 0.822kg/m	JN-100X25 100X25方管 t=1.0 0.672kg/m

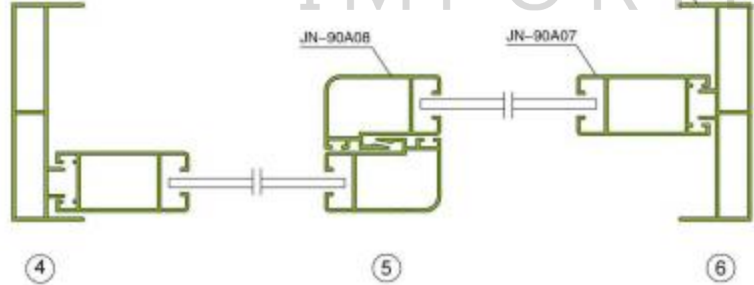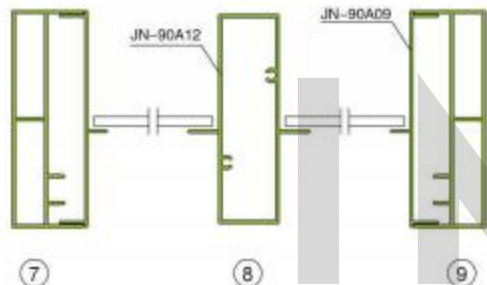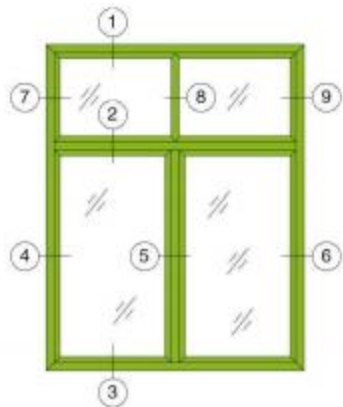

ALM-2 10





序号 Item no. Item no. 厚度 (mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. Item no. 厚度 (mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. Item no. 厚度 (mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings
1 JN-90A01 上滑 t=1.4 1.32kg/m		JN-90A07 光企 t=1.4 0.7kg/m		JN-90A14 转角 t=1.4 1.44kg/m	
2 JN-90A02 下滑 t=1.4 0.793kg/m		JN-90A08 勾企 t=1.4 0.691kg/m		JN-90A15 拼管 1.4 0.98kg/m	
3 JN-90A03 t=1.4 边封 0.977kg/m		JN-90A09 竖板 t=1.2 0.384kg/m		JN-90A16 70° 转角 t=1.4 1.27kg/m	
4 JN-90A03A 发泡封 t=1.4 1.14 kg/m		JN-90A10 纱窗 t=1.2 0.38kg/m			
5 JN-90A04 边封 t=1.4 0.977kg/m		JN-90A11 收口 t=1.2 0.308kg/m			
6 JN-90A05 上固定 t=1.4 0.67kg/m		JN-90A12 中柱 t=1.4 0.997kg/m			
7 JN-90A06 上下方 t=1.4 0.597kg/m		JN-90A13 反插板 t=1.2 0.33kg/m			

+ (86) 186-8880-7020

IMPORTERS EXPORTERS



"Let us help to build your dreams"

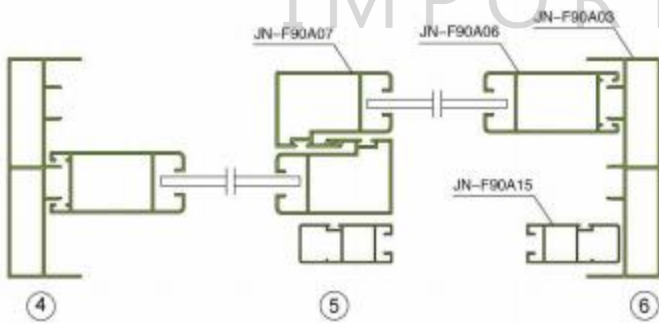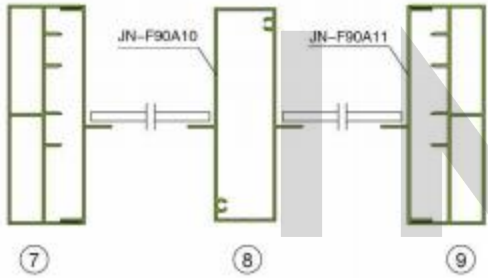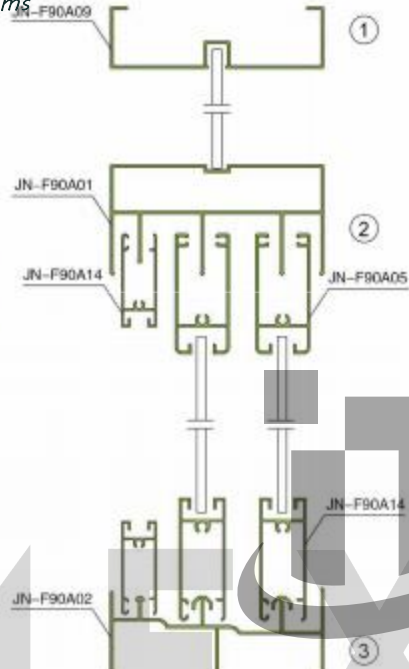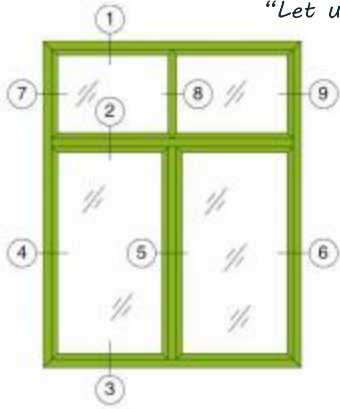






+ (86) 186-8880-7020

IMPORTERS EXPORTERS

**ALM-2 11**

序号 Item no. Item no. Item no. Weight	图示 Drawings	型材代号 Item no. Item no. Item no. Weight	图示 Drawings	型材代号 Item no. Item no. Item no. Weight	图示 Drawings
1	JN-F90A01 管上滑 t=1.0 0.913kg/m	JN-F90A09 上固 t=1.0 0.453kg/m	JN-F90A15 密封胶 t=0.9 0.401kg/m	JN-F90A09 上固 t=1.0 0.453kg/m	JN-F90A15 密封胶 t=0.9 0.401kg/m
2	JN-F90A02 下滑 t=1.0 0.897kg/m	JN-F90A10 中柱 t=1.0 0.706kg/m	JN-F90A18 纱收口 t=0.9 0.122kg/m	JN-F90A10 中柱 t=1.0 0.706kg/m	JN-F90A18 纱收口 t=0.9 0.122kg/m
3	JN-F90A03 管边封 t=1.0 0.746kg/m	JN-F90A11 插板 t=0.9 0.29kg/m	JN-F90A05A 上下方 t=1.1 0.59kg/m	JN-F90A11 插板 t=0.9 0.29kg/m	JN-F90A05A 上下方 t=1.1 0.59kg/m
4	JN-F90A05 上下方 t=1.0 0.435kg/m	JN-F90A13 双边封 t=1.0 0.899kg/m	JN-F90A03A 边封 t=1.1 0.55kg/m	JN-F90A13 双边封 t=1.0 0.899kg/m	JN-F90A03A 边封 t=1.1 0.55kg/m
5	JN-F90A06 光企 t=1.1 0.56kg/m	JN-F90A23 转角 t=1.0 1.109kg/m	JN-F90A14A 横纱 t=0.8 0.26kg/m	JN-F90A23 转角 t=1.0 1.109kg/m	JN-F90A14A 横纱 t=0.8 0.26kg/m
6	JN-F90A07 勾企 t=1.1 0.57kg/m	JN-F90A02A 下滑 t=1.3 0.54kg/m	JN-F90A15A 密封胶 t=0.8 0.334kg/m	JN-F90A02A 下滑 t=1.3 0.54kg/m	JN-F90A15A 密封胶 t=0.8 0.334kg/m
7	JN-F90A08 收口 t=1.0 0.263kg/m	JN-F90A14 横纱 t=0.9 0.35kg/m		JN-F90A14 横纱 t=0.9 0.35kg/m	

"Let us help to build your dreams"

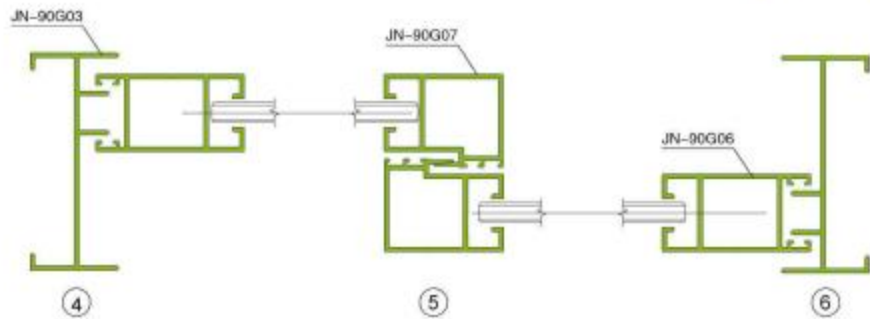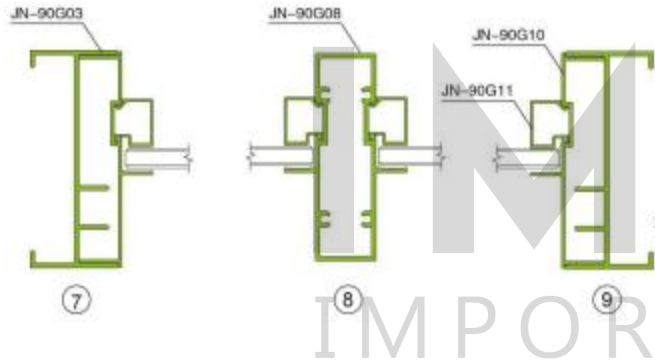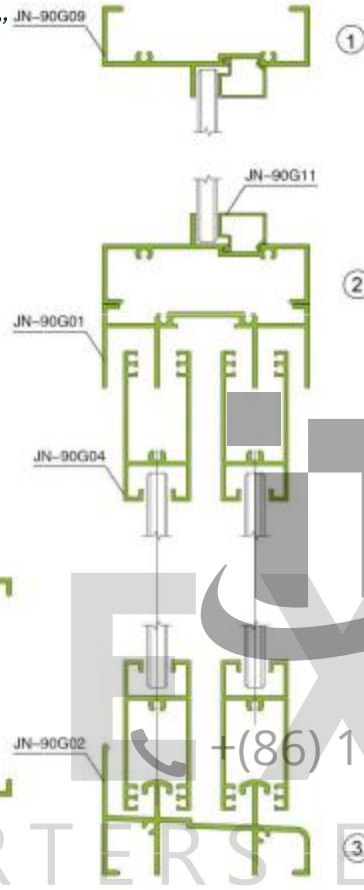
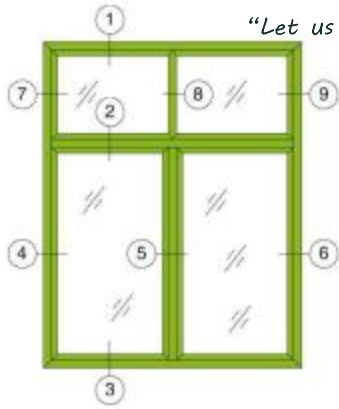


**ALM-2 12**



序号 Item no. 壁厚 (t:mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 壁厚 (t:mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 壁厚 (t:mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings
1 JN-90G01 平上滑 t=1.9 1.22kg/m		JN-90G05 收口 t=1.4 0.35kg/m		JN-90G10 插板 t=1.4 0.55/m	
2 JN-90G01A 管上滑 t=1.9 1.97kg/m		JN-90G06 光企 t=1.9 1.11kg/m		JN-90G11 单玻压线 t=1.0 0.17kg/m	
3 JN-90G02 下滑 t=1.9 1.52kg/m		JN-90G06A 光企 t=1.9 1.118kg/m		JN-90G12 上方 t=1.9 0.794kg/m	
4 JN-90G02A 下滑 t=1.9 1.19kg/m		JN-90G07 勾企 t=1.9 1.06kg/m			
5 JN-90G03 边封 t=1.9 1.04kg/m		JN-90G07A 勾企 t=1.9 0.922kg/m			
6 JN-90G04 上下方 t=1.7 0.93kg/m		JN-90G08 中柱 t=1.9 1.46/m			
7 JN-90G04A 下方 t=1.9 0.871kg/m		JN-90G09 上固定 t=1.9 0.93kg/m			

序号 Item no. Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 壁厚 (t=mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 壁厚 (t=mm) Thickness 理论重量 (kg/m) Weight
1 T55A01 t=1.4 0.541kg/m		T55C02 t=1.4 0.516kg/m		
2 T55A02 t=1.4 0.552kg/m		T5507 t=1.0 0.230kg/m		
3 T55A03 t=1.4 0.521kg/m		T5508 t=3.0 2.185kg/m		
4 T55A04 t=1.4 0.532kg/m		T5518 t=3.0 1.912kg/m		
5 T55B01 t=1.4 0.549kg/m		T5528 1.481kg/m		
6 T55B02 t=1.4 0.639kg/m		10221 t=1.4 0.4kg/m		
7 T55C01 t=1.4 0.68kg/m		10222 t=1.4 0.814kg/m		


"Let us help to build your dreams"

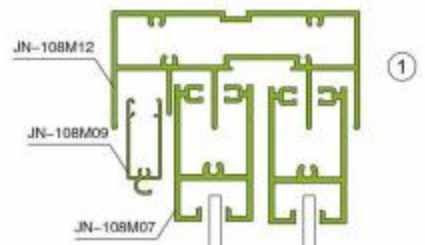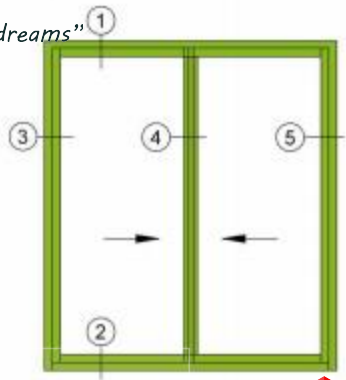


"Let us help to build your dreams"

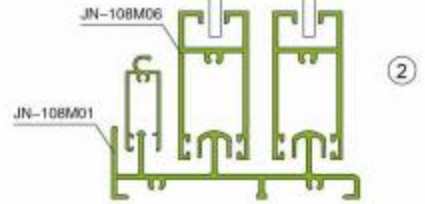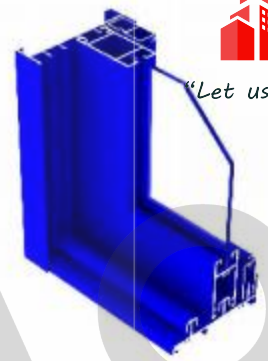

+ (86) 186-8880-7020

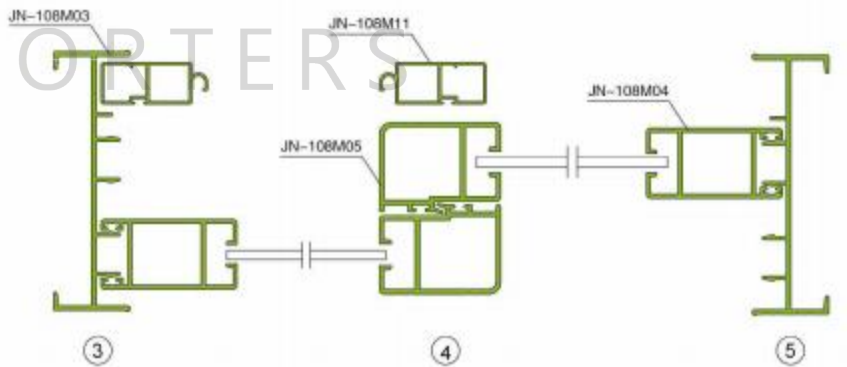


ALM-2 13

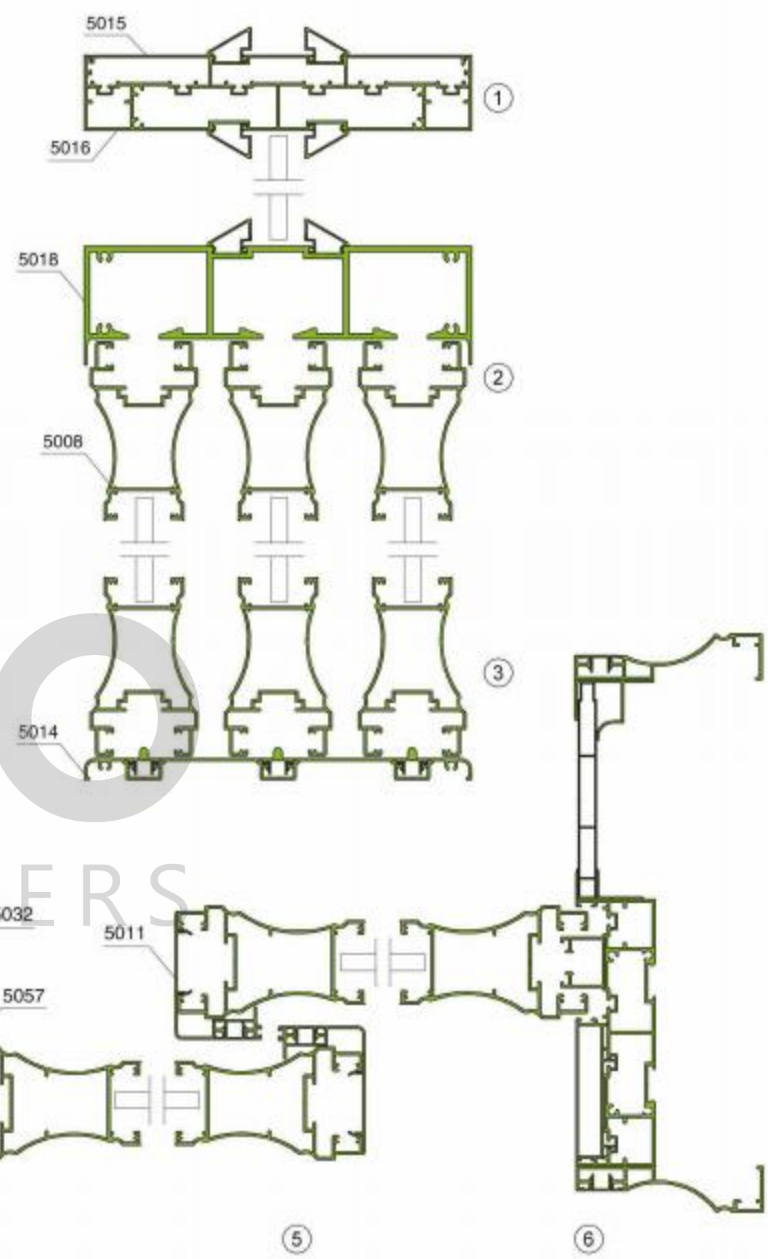

**ALM-2 14**

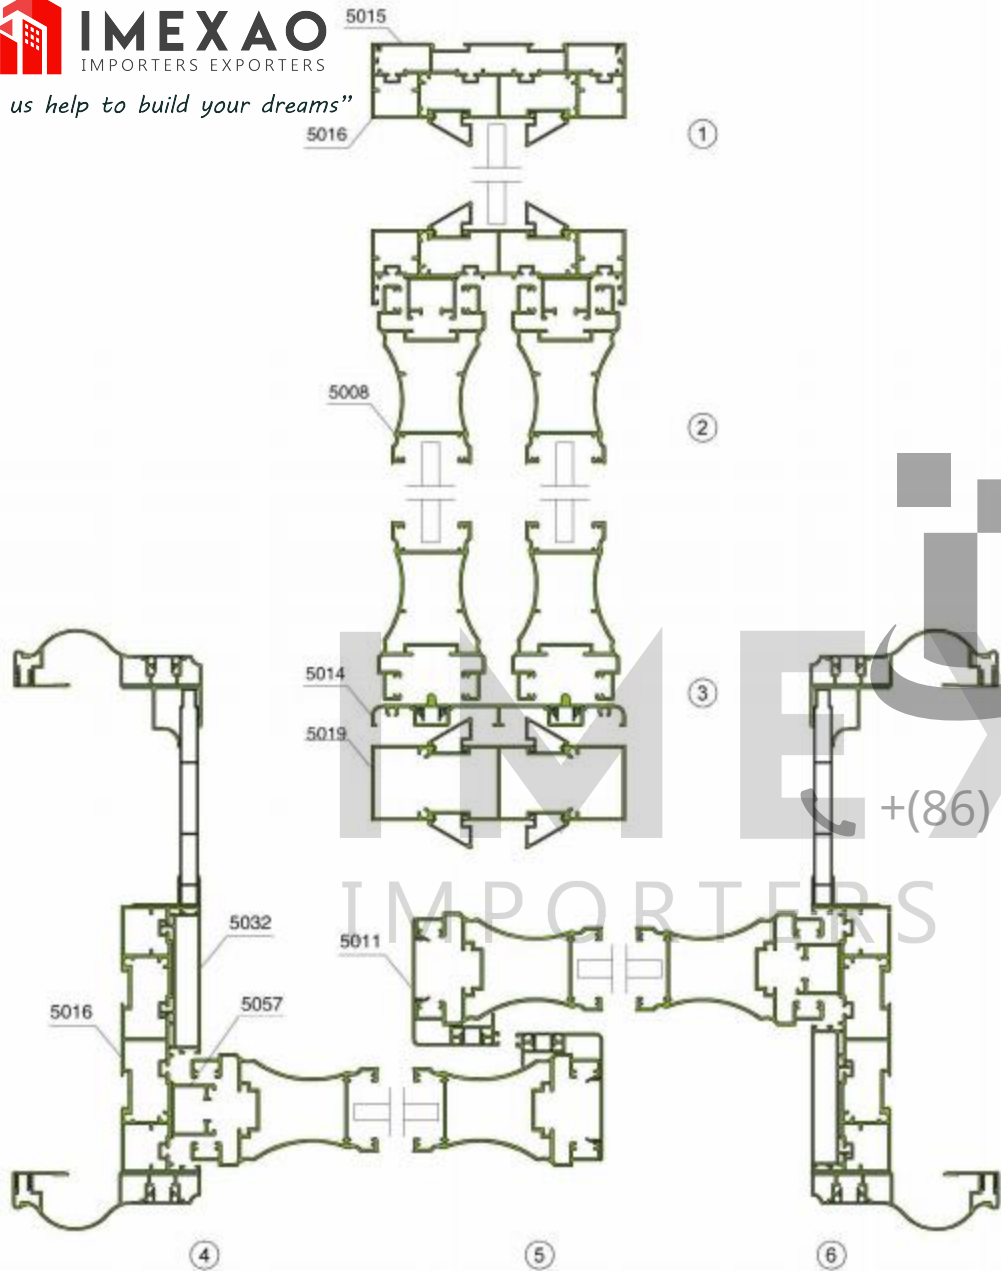



















序号 Item no. Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 壁厚 (t=mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. 壁厚 (t=mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings
1 JN-108M01 下滑 t=2.0 1.5kg/m		JN-108M08 收口 t=1.2 0.398kg/m			
2 JN-108M02 平上滑 t=2.0 1.5kg/m		JN-108M09 下纱 t=1.2 0.37kg/m			
3 JN-108M03 边封 t=2.0 1.17kg/m		JN-108M10 横纱 t=1.2 0.403kg/m			
4 JN-108M04 光企 t=2.0 1.21kg/m		JN-108M11 竖纱 t=1.2 0.489kg/m			
5 JN-108M05 勾企 t=2.0 1.06kg/m		JN-108M12 上滑 t=2.0 2.24kg/m			
6 JN-108M06 下方 t=2.0 0.99kg/m		JN-108M13 管边封 t=2.0 1.69kg/m			
7 JN-108M07 上方 t=2.0 0.975kg/m					



+ (86) 186-8880-7020

IMEXAO IMPORTERS EXPORTERS

**ALM-2 15**

序号 Item no. Item no. 厚度 (t=mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. Item no. 厚度 (t=mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings	型材代号 Item no. Item no. 厚度 (t=mm) Thickness 理论重量 (kg/m) Weight	图示 Drawings
1 5001 凹弧光企 t=1.2 0.979kg/m		5011 50光企封盖 t=1.1 0.41kg/m		5031 33纱网框 t=1.0 0.225kg/m	
2 5003 凹弧外包边框 t=1.2 0.966kg/m		5013A 光企收口 t=1.2 0.55kg/m		5032 装饰板 t=1.0 0.428kg/m	
3 5005 凹弧双包框 t=1.2 0.67kg/m		5014 两轨下滑 t=1.2 0.711kg/m		5033 格条 t=0.8 0.171kg/m	
4 5005-2 凹弧双包框 t=1.2 0.848kg/m		5015 两轨边框盖板 t=1.0 0.427kg/m		5035 边框卡槽 t=1.1 0.244kg/m	
5 5006 凹弧双包框 t=1.2 0.9kg/m		5016 两轨边框 t=1.2 1.496kg/m		5057 平开门中柱 t=1.2 0.824kg/m	
6 5008 凹弧光企 t=1.2 1.064kg/m		5018 两轨吊轨 t=2.5 2.7kg/m		5056 50格条 t=0.7 0.16kg/m	
7 5010 凹弧门套线 t=1.2 1.325kg/m		5019 两轨中柱 t=1.2 1.325kg/m			

# Thank You

---

We appreciate your time and attention. If you have any questions or need further information, please feel free to reach out.

---

 **CHINA OFFICE**

Room 19, 2nd Floor DeYi Commercial Building Construction Road No. 4th, Lecong Town Shunde Foshan, Guangdong, Postal code: 528 315

佛山市顺德区乐从镇建设路四号德怡商业大厦北门二楼19-3铺 528315

 + (86) 186-8880-7020     [goldy@imexao.com](mailto:goldy@imexao.com)



@imexao